

APP CRS  
256°

Rwy Idg  
7867

TDZE  
683

Apt Elev  
729

RNAV (RNP) Y RWY 25L


GENERAL MITCHELL INTL (MKE)

RF required. RNP AR APCH.

MISSED APPROACH: Climb to 3700 on the RNAV missed approach route to PROOT and hold.

For uncompensated Baro-VNAV systems, procedure NA below -20°C or above 54°C.

D-ATIS 126.4	MILWAUKEE APP CON 126.5 307.0	MILWAUKEE TOWER 124.575 269.05	GND CON 121.8 263.125	CLNC DEL 120.8	CPDLC
-----------------	----------------------------------	-----------------------------------	--------------------------	-------------------	-------

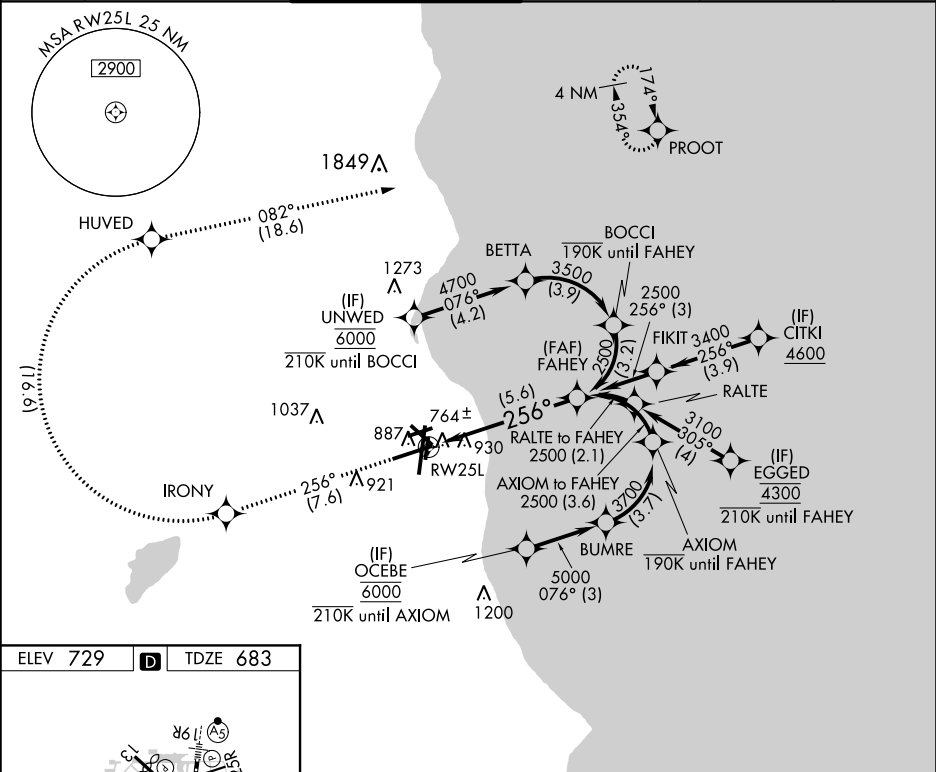

ELEV 729

TDZE 683

3700

IRONY

HUVED

PROOT

See planview for multiple IF locations.

RW25L

256°

FAHEY 2500

2500

GP 3.00°

TCH 47

5.6 NM

CATEGORY	A	B	C	D
RNP 0.10 DA		1087-1½	404 (400-1½)	
RNP 0.30 DA		1256-2	573 (600-2)	

AUTHORIZATION REQUIRED