


APP CRS	Rwy Idg	12000
259°	TDZE	10
	Apt Elev	13

RNAV (RNP) RWY 26L


DANIEL K INOUEY INTL (HNL) (PHNL)

RNP AR APCH, RF required.	MAISF	MISSED APPROACH: Climb to 3000 on track 259° to KABTE, left turn to LAYIG, then track 133° to ALANA and hold. Missed approach requires minimum climb of 234 feet per NM to 300.
For uncompensated Baro-VNAV systems, procedure NA below 15°C (58°F) or above 53°C (128°F).		

D-ATIS	HCF APPROACH	HONOLULU TOWER	GND CON	CLNC DEL
127.9 251.15	118.3 269.0	118.1 257.8 123.9 273.575 (Rwy 8R/26L)	121.9 348.6	121.4 281.4

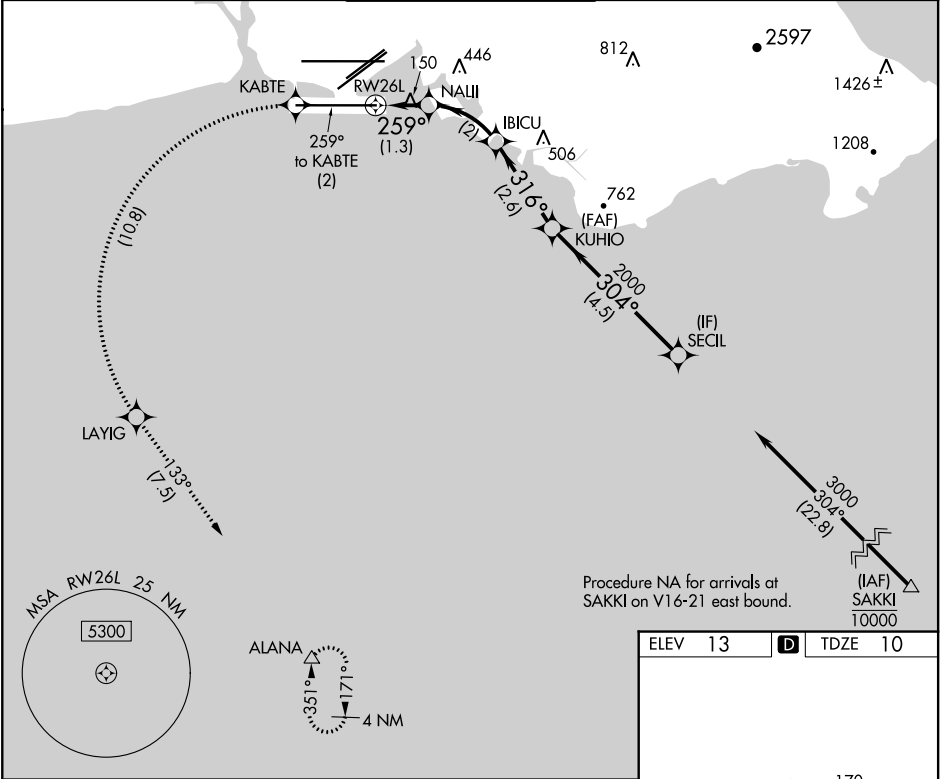

3000 ↑ tr 259°	KABTE 	LAYIG 	tr 133°	ALANA △	SECIL
CATEGORY	A	B	C	D	
RNP 0.15 DA	260-3/4 250 (300-3/4)				
AUTHORIZATION REQUIRED					

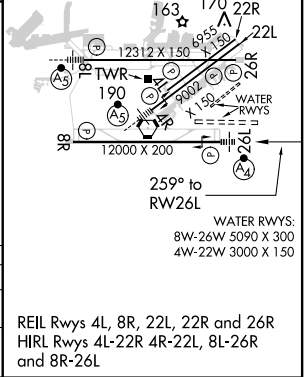

PAC, 27 JAN 2022 to 24 MAR 2022

PAC, 27 JAN 2022 to 24 MAR 2022