
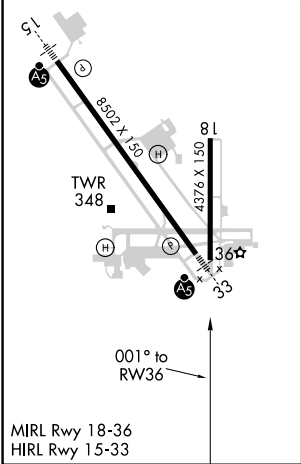


WAAS CH 50215 W36A	APP CRS 001°	Rwy Idg 4376 TDZE 216 Apt Elev 219
--	------------------------	---

RNAV (GPS) RWY 36
MOBILE RGNL (MOB)

RNP APCH.	MISSED APPROACH: Climb to 2000 direct CECAP and hold.
Rwy 36 helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C.	

ATIS 124.75 257.85	MOBILE APP CON ★ 118.5 269.3	MOBILE TOWER ★ 118.3 (CTAF) 0 239.0	GND CON 121.9 348.6	CLNC DEL 119.85	UNICOM 122.95
------------------------------	--	---	-------------------------------	---------------------------	-------------------------

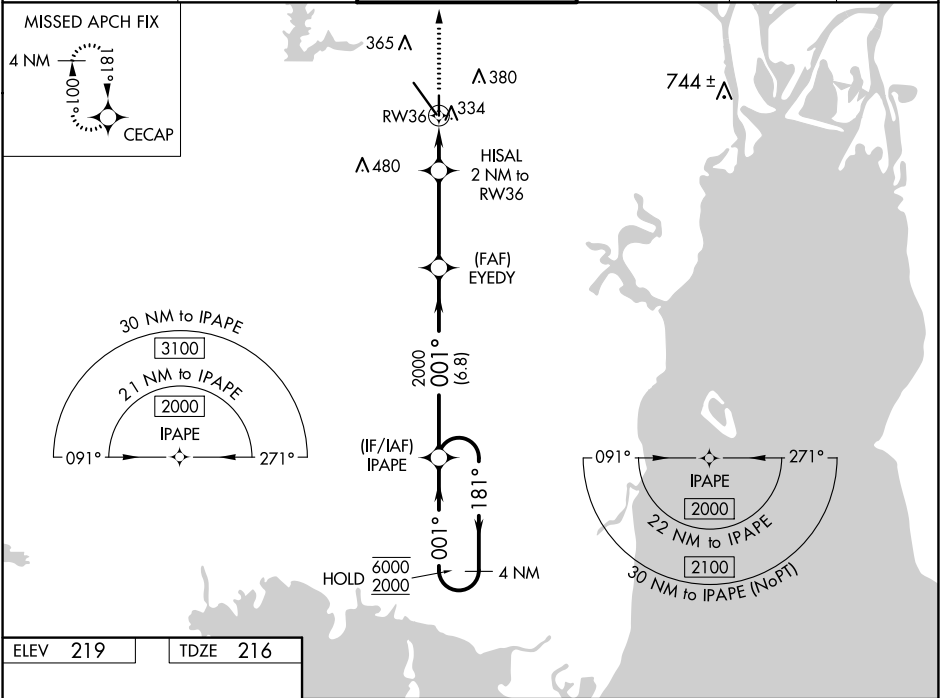

2000	CECAP				
*LNAV only.	HISAL 2 NM to RW36	EYEDY 2000	IPAPE	4 NM Holding Pattern	
1 NM to RW36	900	2000	181°	6000	GP 3.00° TCH 57
1 NM	1 NM	3.4 NM	6.8 NM		
CATEGORY	A	B	C	D	
LPV DA	482-7/8	266 (300-7/8)			
LNAV/VNAV DA	505-7/8	289 (300-7/8)			
LNAV MDA	600-1	384 (400-1)	600-1 1/8	384 (400-1 1/8)	
CIRCLING	680-1	461 (500-1)	740-1 1/2	780-2	
			521 (600-1 1/2)	561 (600-2)	

SE-4, 27 JAN 2022 to 24 FEB 2022

SE-4, 27 JAN 2022 to 24 FEB 2022