

WAAS CH 49112 W35A	APP CRS 352°	Rwy Idg TDZE Apt Elev	11022 6075 6187
--	------------------------	-----------------------------	--


RNAV (GPS) Y RWY 35L
CITY OF COLORADO SPRINGS MUNI (COS)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSR increase LNAV Cat C and D visibility to RVR 5500. RADAR monitoring required when R-2601 in use. # RVR 1800 authorized with use of FD or AP or HUD to DA.




MISSED APPROACH:
Climb to 6700 then dimbing right turn to 9000 direct ADANE and hold.

ATIS 125.0 254.3	SPRINGS APP CON 124.0 257.875	SPRINGS TOWER 119.9 360.6	GND CON 121.7 348.6	CLNC DEL 134.45 363.125
----------------------------	---	-------------------------------------	-------------------------------	-----------------------------------

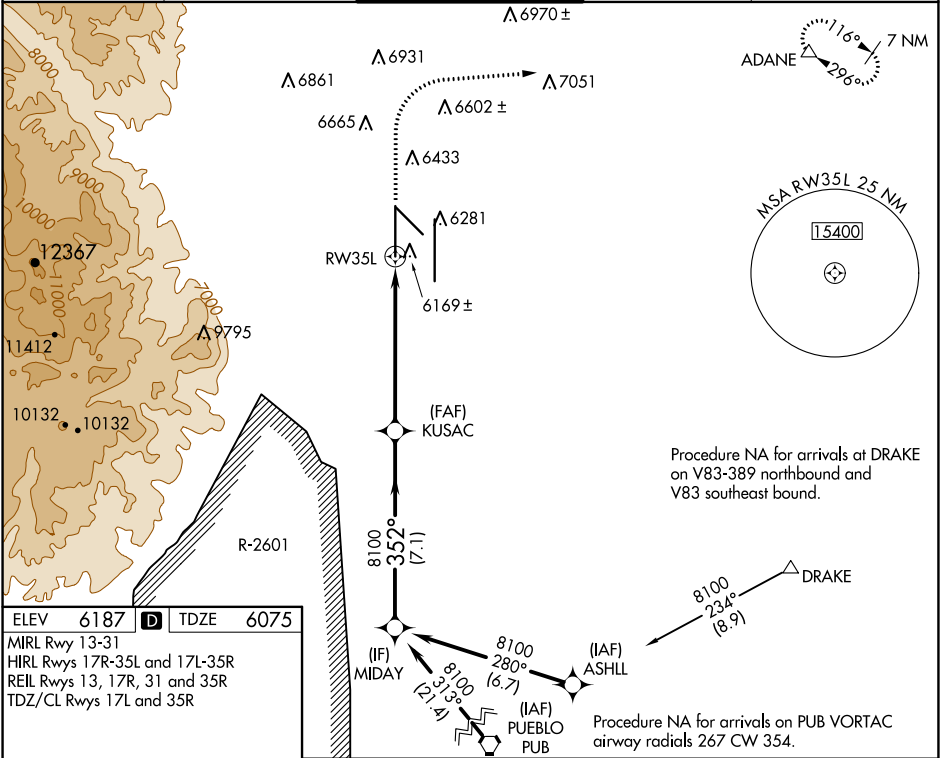

ELEV 6187	D	TDZE 6075
MIRL Rwy 13-31		
HIRL Rwy 17R-35L and 17L-35R		
REIL Rwy 13, 17R, 31 and 35R		
TDZ/CL Rwy 17L and 35R		

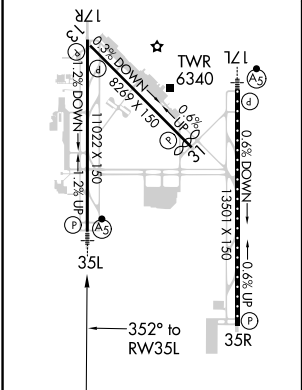

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).			
MIDAY			
GP 3.00° TCH 55			
KUSAC 8100			
8100 352° 8100			
7.1 NM 5.3 NM 1 NM			
RW35L			
*1 NM to RW35L *LNAV only			
6700 9000 ADANE			
CIRCLING			
6740-1 553 (600-1)			
6800-1 613 (700-1)			
7040-2½ 853 (900-2½)			
7260-3 1073 (1100-3)			

SW-1, 27 JAN 2022 to 24 FEB 2022

SW-1, 27 JAN 2022 to 24 FEB 2022