



APP CRS	Rwy Idg	7590
275°	TDZE	17
	Apt Elev	17

RNAV (RNP) Z RWY 27

SAN DIEGO INTL (SAN)

RNP AR APCH.	MALS	MISSED APPROACH: Climb to 2500 on track 275° to SARGs and hold.
For uncompensated Baro-VNAV systems, procedure NA below 6°C or above 46°C. Straight-in Rwy 27 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For inop ALS, increase RNP 0.30 all Cats visibility to 2½ SM.	Ⓜ=	

D-ATIS	SOCAL APP CON	LINDBERGH TOWER	GND CON	CLNC DEL	CPDLC
134.8	119.6 363.1 (WEST) 124.35 279.625 (EAST)	118.3 338.225	123.9	125.9	

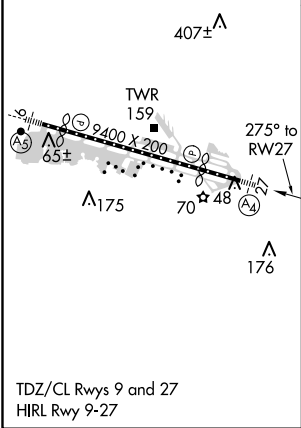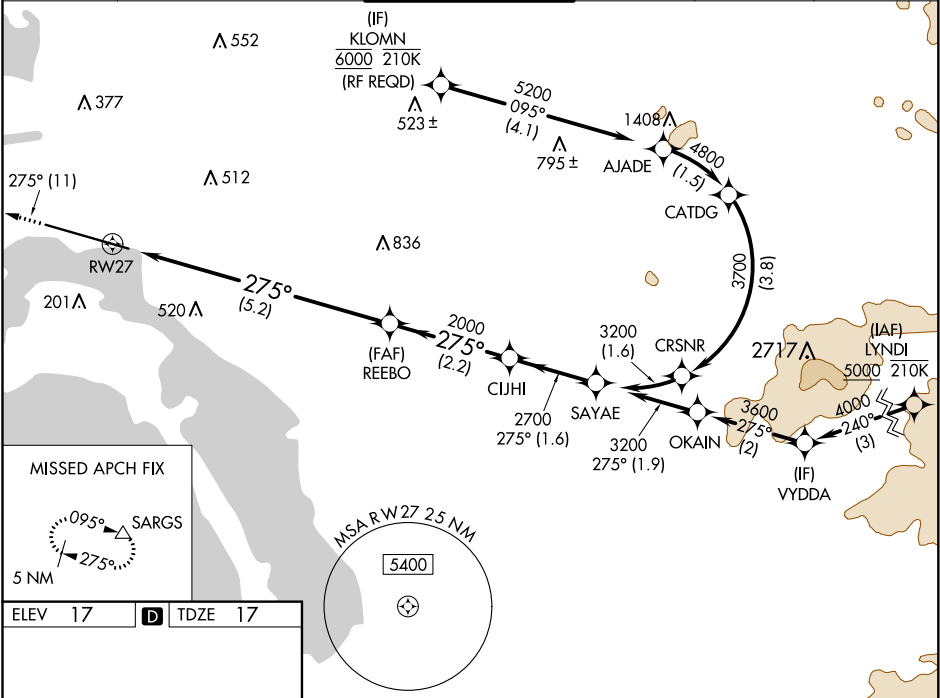

ELEV 17	TDZE 17	See planview for multiple IF locations.			
		SARGs			
		REEBO			
		CIJHI			
		SAYAE			
		3200			
		2700			
		2000			
		GP 3.50°			
		TCH 65			
		5.2 NM			
		2.2 NM			
		1.6 NM			
CATEGORY	A	B	C	D	
RNP 0.11 DA	617-1½ 600 (600-1½)				
RNP 0.30 DA	778-2 761 (800-2)				
AUTHORIZATION REQUIRED					