
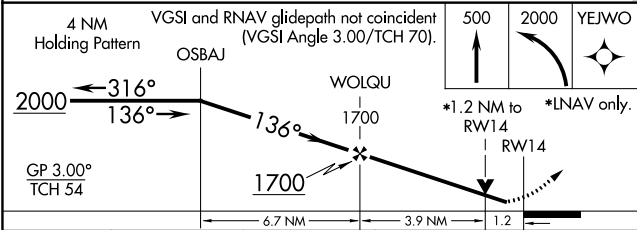


WAAS CH 70626 W14A	APP CRS 136°	Rwy Idg TDZE 27 Apt Elev 30
--	------------------------	---

RNAV (GPS) Z RWY 14
JACKSONVILLE INTL (JAX)

<div><div></div><div>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). For inoperative MALSR, increase LNAV/VNAV all Cats visibility to 1½ miles and increase LNAV Cats A/B to 1 mile. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.</div></div>	<div><div>MALSR</div><div><div></div><div>AS</div></div></div>		<div>MISSED APPROACH: Climb to 500 then climbing left turn to 2000 direct YEJWO and hold.</div>	
	<div>D-ATIS 125.85</div>	<div>JACKSONVILLE APP CON 119.0 269.9</div>	<div>JACKSONVILLE TOWER 118.3 317.7</div>	<div>GND CON 121.9 348.6</div>

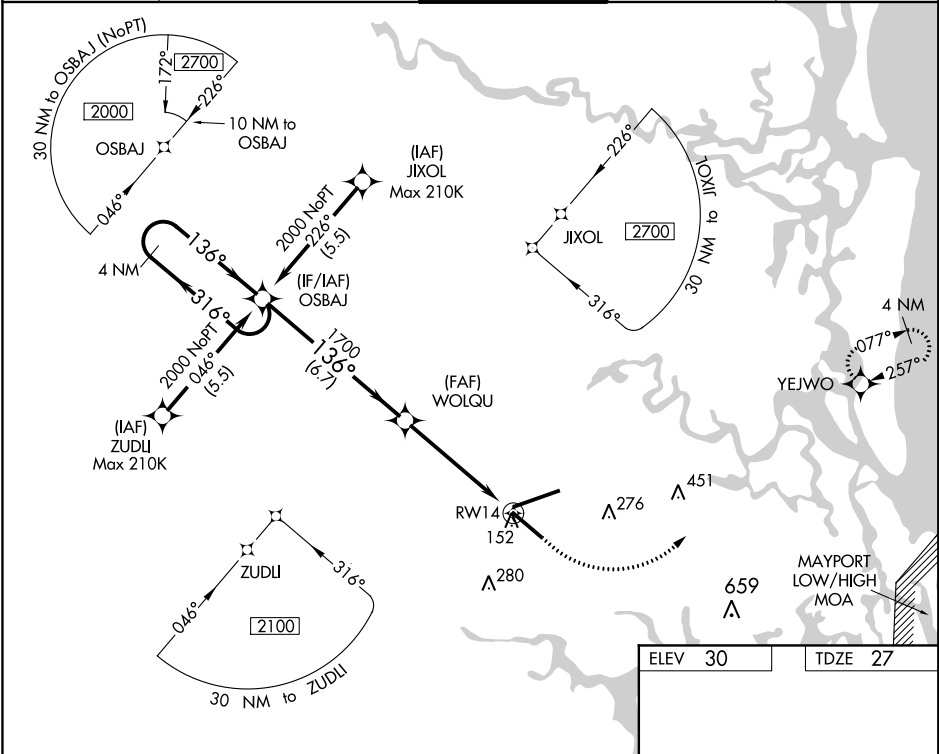

CATEGORY	A	B	C	D
LPV DA	227-½	200 (200-½)		
LNAV/VNAV DA	363-¾	336 (400-¾)		
LNAV MDA	480-¾	453 (500-¾)	480-⅞	453 (500-⅞)
CIRCLING	520-1	490 (500-1)	580-1½	640-2

