
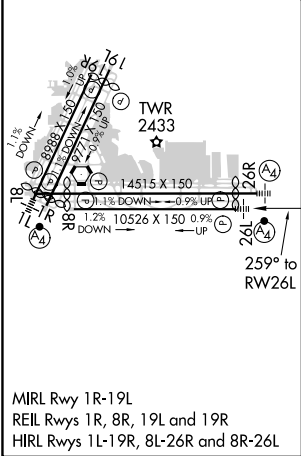


APP CRS	Rwy Idg
259°	10526
TDZE	2069
Apt Elev	2181

RNAV (RNP) RWY 26L
HARRY REID INTL (LAS)

RNP AR APCH. ▼ For uncompensated Baro-VNAV systems, procedure NA below 0°C or above 54°C.		MALSF ⏏	MISSED APPROACH: Climb to 7000 on the RNAV missed approach route to BLD VORTAC and hold. * Missed approach requires minimum climb of 255 feet per NM to 3200.	
D-ATIS 132.4	LAS VEGAS APP CON 125.025 379.15 (West) 125.6 282.2 (East)	LAS VEGAS TOWER 118.75 257.8 (Rwy 1L/19R, 1R/19L) 119.9 257.8 (Rwy 8L/26R, 8R/26L)	GND CON 121.1 270.8 E of 1R/19L 121.9 254.3 W of 1R/19L	CLNC DEL 118.0
				CPDLC

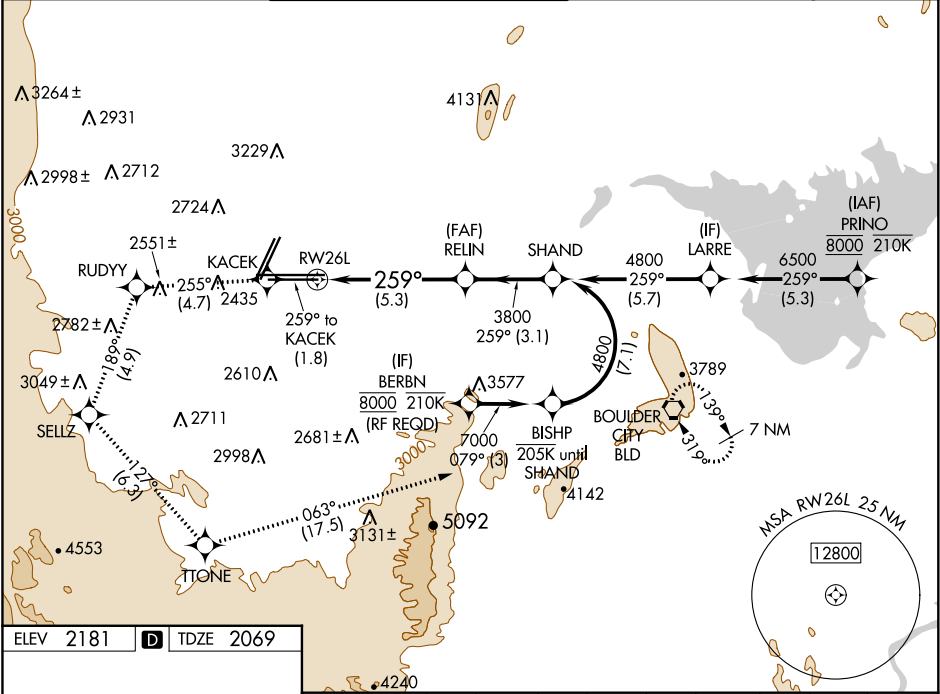

7000	KACEK	RUDYY	SELLZ	TTONE	BLD
↑ tr 259°	✧ tr 255°	✧ tr 189°	✧ tr 127°	✧ tr 063°	◻
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 84). See planview for multiple IF locations.					SHAND
					4800
					GP 3.00° TCH 60
CATEGORY	A	B	C	D	
RNP 0.30 DA*	2450-7/8 381 (300-7/8)				
RNP 0.30 DA	2502-1 433 (400-1)				
AUTHORIZATION REQUIRED					