

APP CRS <b>087°</b>	Rwy Idg <b>10000</b> TDZE <b>91</b> Apt Elev <b>96</b>
------------------------	--

## RNAV (RNP) Y RWY 9

GEORGE BUSH INTCNL/HOUSTON (IAH)

**T**


For uncompensated Baro-VNAV systems, procedure NA below -3°C (27°F) or above 54°C (130°F). GPS required. For inop MALSR, increase all Cats visibility to 1 $\frac{3}{8}$  mile. Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR





**MISSED APPROACH:** Climb to 580 then climbing right turn to 3000 direct JEBOX and hold.

D-ATIS <b>124.05</b>	HOUSTON APP CON <b>120.05 379.1</b> EAST <b>124.35 316.15</b> WEST	HOUSTON TOWER <b>135.15 290.2</b>	GND CON <b>118.575</b>	CLNC DEL <b>128.1</b>	CPDLC
-------------------------	--	--------------------------------------	---------------------------	--------------------------	-------

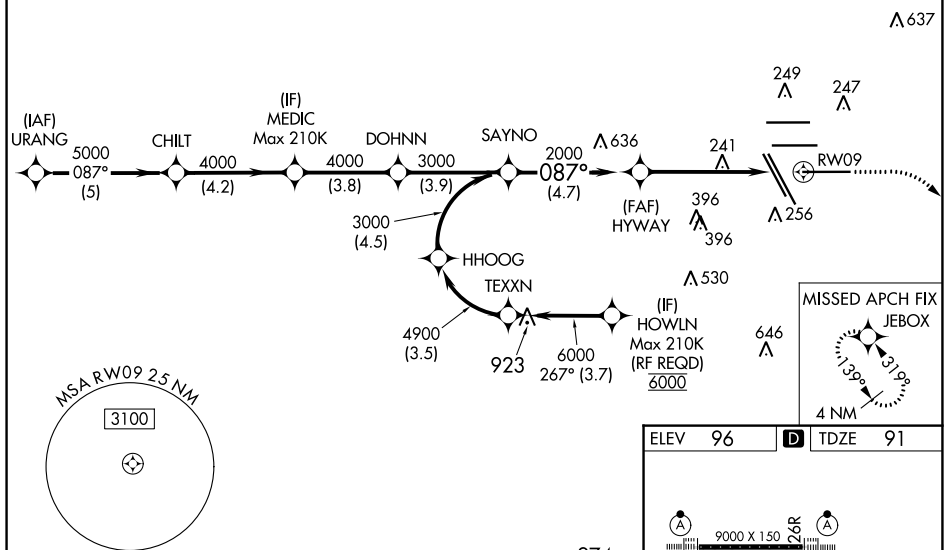

ELEV	96	<b>D</b>	TDZE	91
------	----	----------	------	----

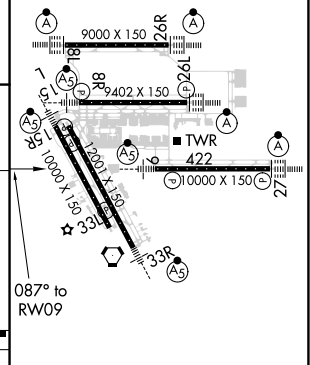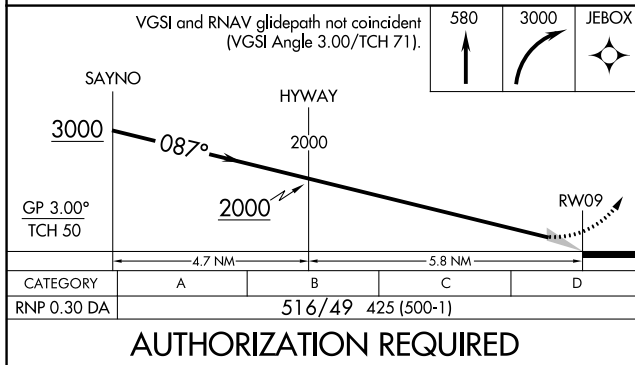

TDZ/CL Rwy's 8R, 8L, 15R, 26R, 26L,  
27 and 33L  
HIRL all Rwy's

**AUTHORIZATION REQUIRED**