463

WAAS 5000 Rwy Idg APP CRS CH 99414 TDŹE 463 079° **W08A** Apt Elev 463

## RNAV (GPS) RWY 8L

SPIRIT OF ST LOUIS (SUS)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. MISSED APPROACH: Climb to 3000 direct DBLEE and right VDP and Baro-VNAV NA when using St Louis Lambert Intl altimeter setting turn on track 171° to BNANA When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and and right turn on track 272° increase LPV DA to 912, LNAV/VNAV DA to 1132 and all MDA 60 feet, increase LPV all to DERDF and hold. Cats visibility to 11/2 miles.

**1**970

• 682

**ELEV** 463

ST. LOUIS CLNC DEL **ATIS** ST. LOUIS APP CON SPIRIT TOWER★ **GND CON** CLNC DEL UNICOM 121,7 134.8 126.5 254.3 124.75 (CTAF) 0 257.2 121.7 133.1 122,95 (when tower closed)

1128 ₺


Procedure NA for arrival at FTZ VORTAC on airway radials 082 CW 150. (IAF)


NC-3,

27 JAN 2022

ō

24 FEB

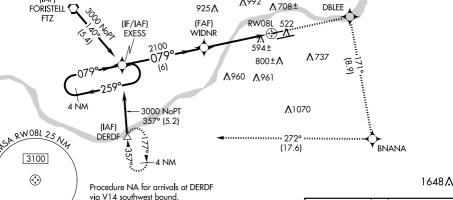

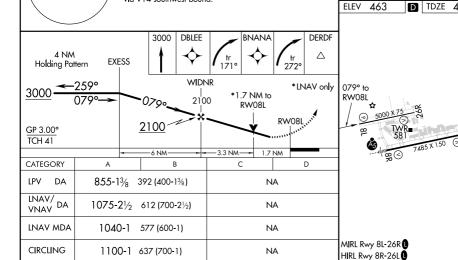

ST. LOUIS, MISSOURI Orig-A 31MAR16

SPIRIT OF ST LOUIS (SUS) RNAV (GPS) RWY 8L