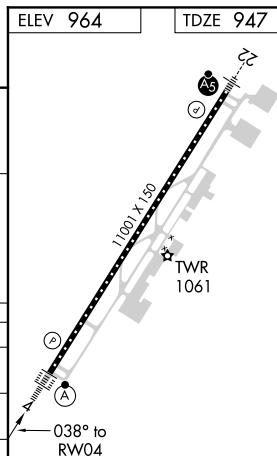
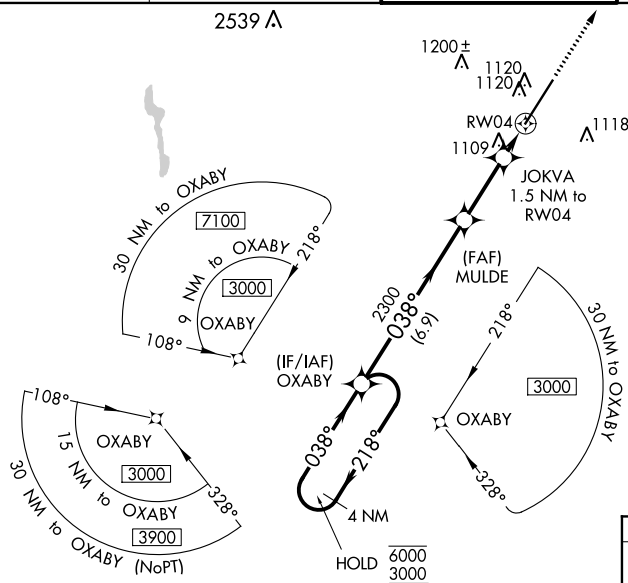


RNAV (GPS) RWY 4  
GREENVILLE SPARTANBURG INTL (GSP)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1% SM and increase LNAV Cat C/D visibility to RVR 6000. When local altimeter setting not received, use Greenville Downtown altimeter setting: increase LPV DA to 1176 feet and LNAV/VNAV DA to 1450 feet and all Cats visibility to RVR 5500; increase all MDAs 40 feet and visibility LNAV Cats C and D to RVR 4500 and Circling Cat D visibility ¼ SM. For inop ALS, when using Greenville Downtown altimeter setting, increase LNAV/VNAV all Cats visibility to 1% SM. Baro-VNAV NA when using Greenville Downtown altimeter setting.

**MISSED APPROACH:**  
Climb to 3000 direct  
RAYCE and hold.

UNICOM  
122.95

CL Rwy 22 **L**  
HIRL Rwy 4-22 **L**  
TDZ/CL Rwy 4