

Rwy Idg	7510
TDZE	43
Apt Elev	46

RNAV (GPS) Y RWY 31
CORPUS CHRISTI INTL (CRP)

T Procedure NA when Cabaniss Field traffic patterns active. DME/DME RNP-0.3 NA.
A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F). For inop MALSR, increase LPV Cat E visibility to ¾ mile, LNAV/VNAV all Cats visibility to 1 mile, and LNAV Cat E visibility to 1½ mile.

MALSR

MISSED APPROACH:
Climb to 2000 direct
ATHIS and hold.


ATIS
126.8

CORPUS APP CON
120.9 348.725

CORPUS TOWER
119.4 257.8

GND CON
121.9 269.1

CLNC DEL
118.55

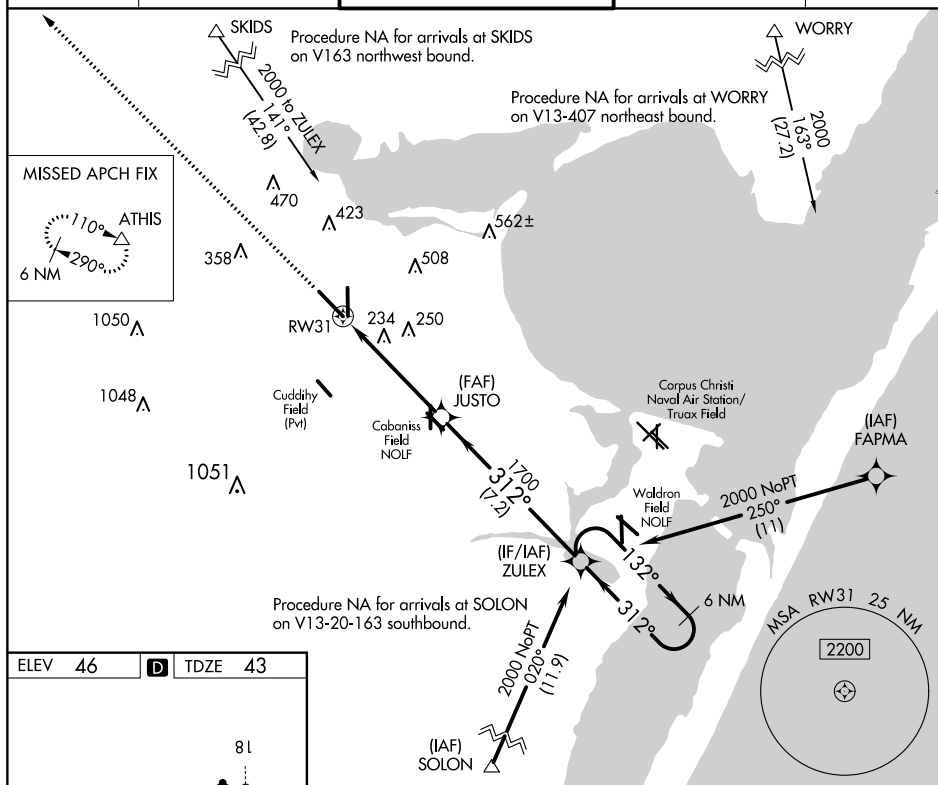

ELEV	46		TDZE	43
------	----	---	------	----

