
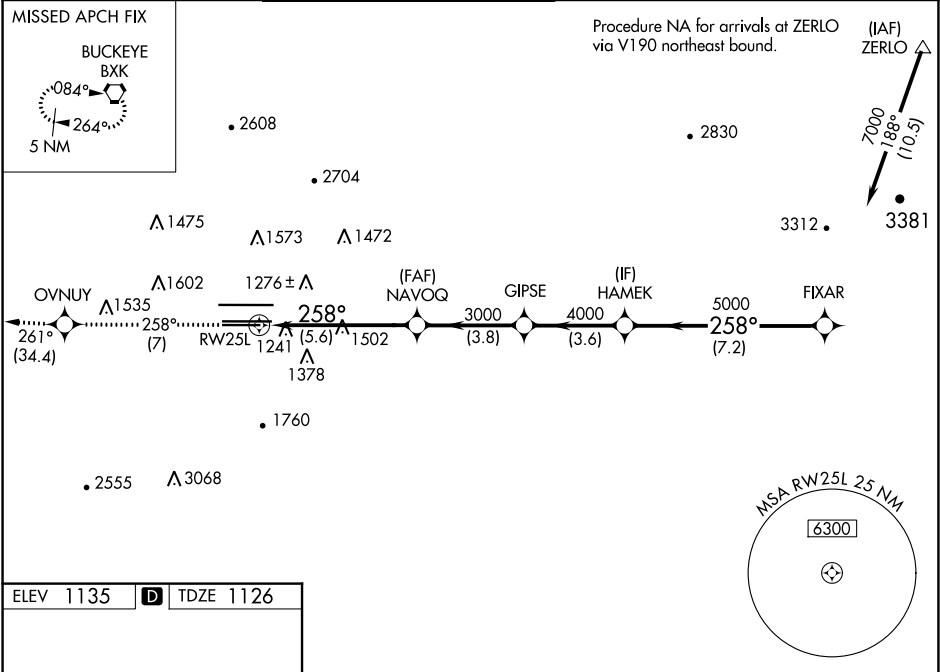


APP CRS	Rwy Idg	7800
258°	TDZE	1126
	Apt Elev	1135


RNAV (RNP) Z RWY 25L  
PHOENIX SKY HARBOR INTL (PHX)

▼ For inoperative MALSR, increase RNP 0.11 all Cats visibility to 1¾, RNP 0.30 all Cats visibility to 2. Visibility reduction by helicopters NA. GPS required. For uncompensated Baro-VNAV systems, procedure NA below 1°C (34°F) or above 46°C (116°F). Simultaneous approach authorized with ILS or LOC Rwy 26. Use of FD or AP providing RNAV track guidance required during simultaneous operations.	MALSR 	MISSED APPROACH: Climb to 5000 via track 258° to OVNUY and via track 261° to BKK VORTAC and hold.
--	--	---

D-ATIS	PHOENIX APP CON	PHOENIX TOWER	GND CON	CLNC DEL	CPDLC
127.575	128.65 353.9	118.7 278.8 (Rwy 8-26) 120.9 254.3 (Rwy 7L-25R, 7R-25L)	119.75 269.2 (N) 132.55 269.2 (S)	118.1 269.2	



ELEV 1135	D	TDZE 1126
-----------	---	-----------

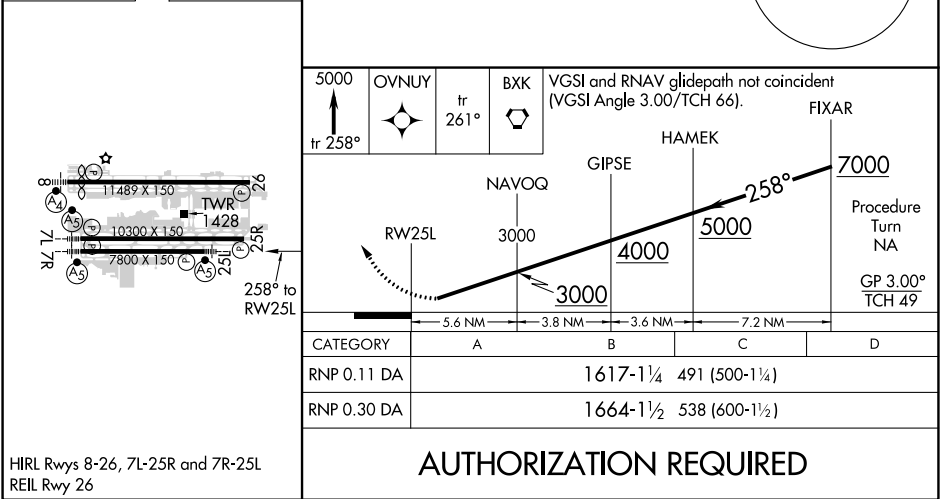

SW-4, 27 JAN 2022 to 24 FEB 2022

SW-4, 27 JAN 2022 to 24 FEB 2022