RNAV (RNP) Z RWY 34

ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (ROA)

APP CRS	Rwy ldg	5810
336°	TDZE	1160
	Apt Elev	1175

RNP AR APCH. RF required.

Missed approach requires RNP less than 1.0. For inop ALS, increase RNP 0.30* all Cats visibility to 1⅜ SM. Inop table does not apply to RNP 0.30. For uncompensated Baro-VNAV systems, procedure NA below -14°C or above 54°C.

-13°C

MALSR

MISSED APPROACH: Climb to 6000 on track 336° to DMOSS, right turn to SETHB, right turn to JEEVY and on track 093° to PROSE and hold. * Missed approach requires minimum climb of 350 feet per NM to 4100. # Missed approach requires minimum climb of 415 feet per NM to 4100.

ATIS	ROANOKE APP CON	ROANOKE TOWER	GND CON	CLNC DEL
132.375	126.9 339.8	118.3 257.8	121.9 257.8	119.7

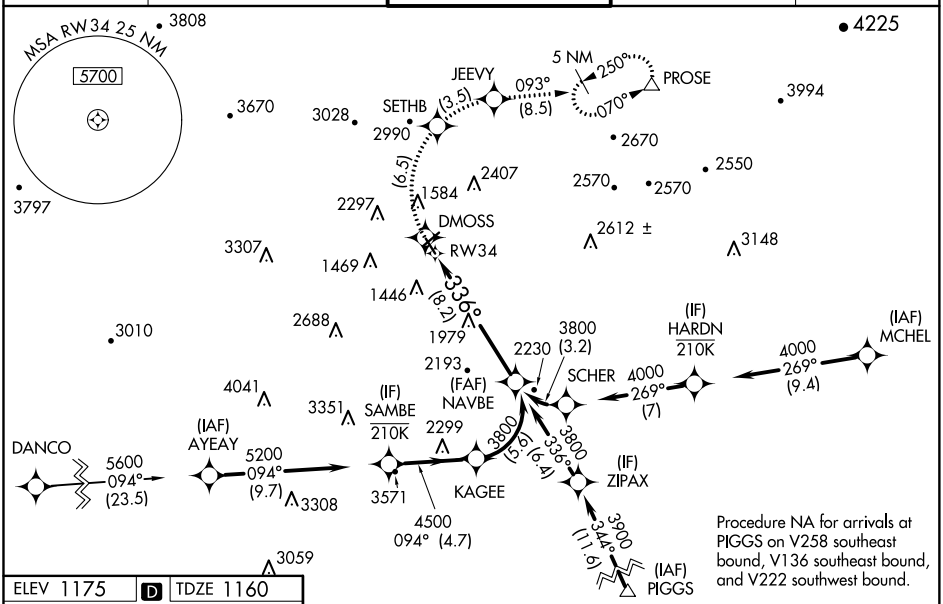

Procedure NA for arrivals at PIGGS on V258 southeast bound, V136 southeast bound, and V222 southwest bound.

ELEV 1175 | D | TDZE 1160

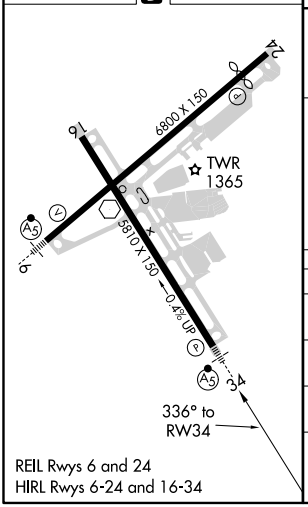

REIL Rwys 6 and 24
HIRL Rwys 6-24 and 16-34

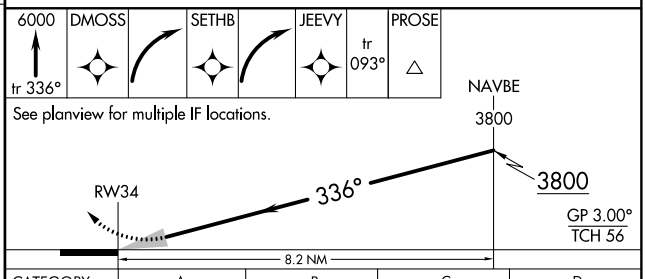

CATEGORY	A	B	C	D
RNP 0.15 DA #	1495-½ 335 (400-½)			
RNP 0.30 DA*	1646-1 486 (500-1)			
RNP 0.30 DA	2115-4 955 (1000-4)			

AUTHORIZATION REQUIRED

NE-3, 27 JAN 2022 to 24 FEB 2022

NE-3, 27 JAN 2022 to 24 FEB 2022