

ILS or LOC RWY 18R  
ORLANDO INTL (MCO)

MALSR

**MISSED APPROACH:** Climb to 500 then climbing right turn to 4000 on heading 270° and on ORL VORTAC R-227 to CAMBE INT/ORL 20 DME and hold, continue climb-in-hold to 4000.

**T** Simultaneous approach authorized.


MISSED APCH FIX  
CAMBE ORL (20)  
112.2 ORL  
Chan 59  
R-291  
115.85 MLB  
Chan 105 (Y)  
R-227  
047°  
227°

(IAF) YAGGO  
6000 210K  
4000  
115°  
16.1

(IAF) HOLOP  
I-TFE (20.5)  
RADAR  
5000 210K  
(IF) NAVAL  
I-TFE (17.5)  
RADAR  
ONNER  
I-TFE (14.3)  
005°  
4000  
185°  
3000  
185°  
(3.1)  
(3.2)

CAMBE LAL (29)  
116.0 LAL  
Chan 107  
R-291  
115.85 MLB  
Chan 105 (Y)  
R-046  
046°  
226°

ALTERNATE MISSED APCH FIX

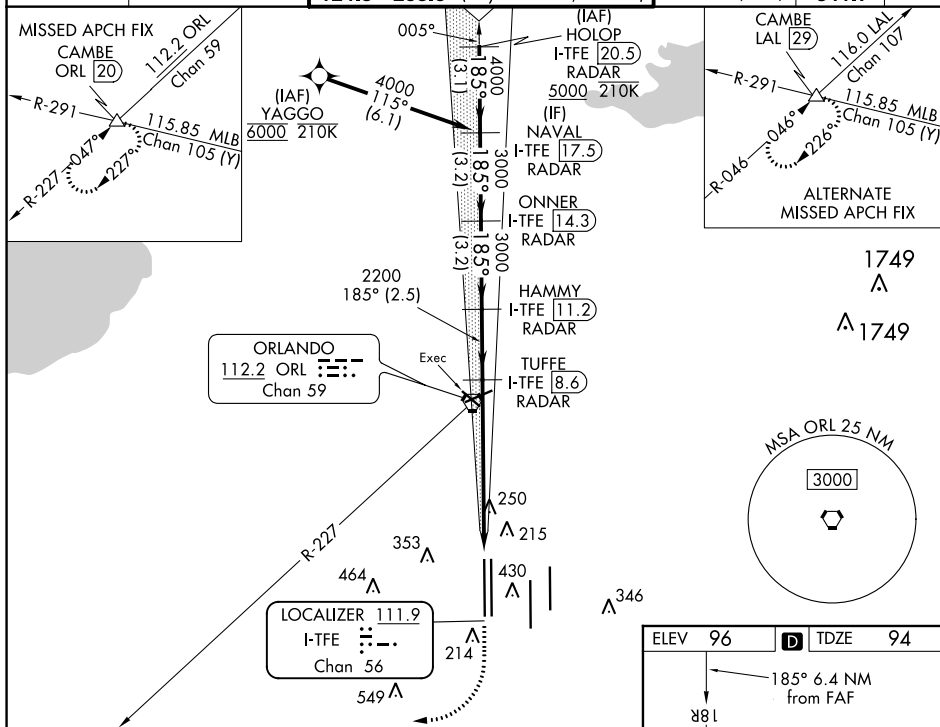

ELEV	96	D	TDZE	94
<p>HIRL all Rwys  REIL Rwy 36L  TDZ/CL Rwys 17L/R, 18R,  35L/R, and 36R</p>				
FAF to MAP 6.4 NM				
Knots	60	90	120	150
Min:Sec	6:24	4:16	3:12	2:34
				2:08

SE-3, 27 JAN 2022 to 24 FEB 2022

SE-3, 27 JAN 2022 to 24 FEB 2022