| WAAS CH 77706 W23B | APP CRS 230° | Rwy ldg 11200<br>TDZE 783<br>Apt Elev 796 |
|---|---|---|

# RNAV (GPS) Y RWY 23R
## INDIANAPOLIS INTL (IND)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative ALS, increase LNAV Cat C/D visibility to RVR 6000. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.
**RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct KEADY and hold.

| D-ATIS | INDIANAPOLIS APP CON | INDY TOWER | GND CON | CLNC DEL | CPDLC |
|---|---|---|---|---|---|
| 134.25 | 128.175 317.8 | 120.9 257.8 | 121.9 | 128.75 257.8 | |

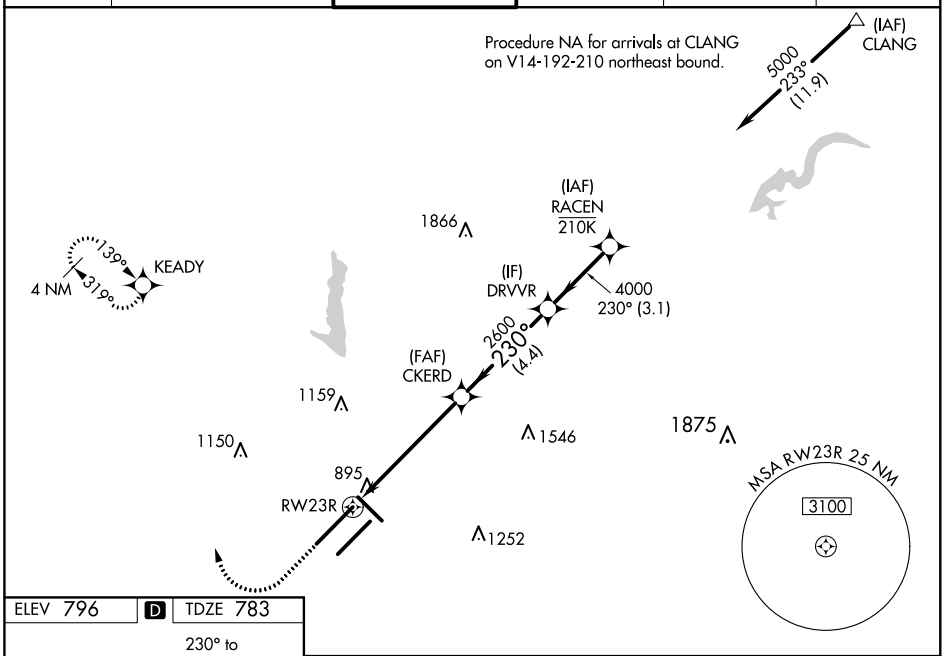


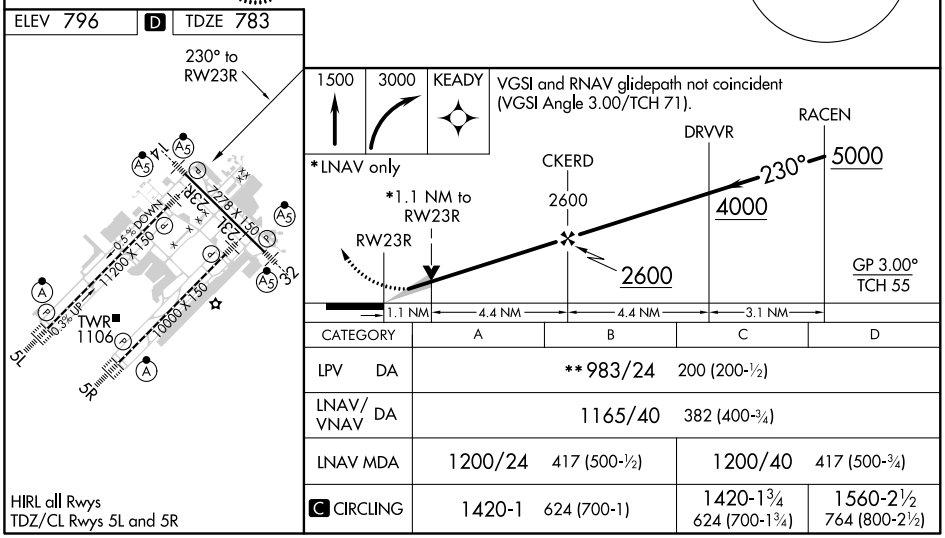


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | **983/24 200 (200-½) | | | |
| LNAV/VNAV DA | 1165/40 382 (400-¾) | | | |
| LNAV MDA | 1200/24 417 (500-½) | | 1200/40 417 (500-¾) | |
| C CIRCLING | 1420-1 624 (700-1) | | 1420-1¾ 624 (700-1¾) | 1560-2½ 764 (800-2½) |

HIRL all Rwys
TDZ/CL Rwys 5L and 5R


EC-2, 27 JAN 2022 to 24 FEB 2022