9000 Rwy Idg APP CRS TDŹE 580 303° Apt Elev 618

## RNAV (RNP) Z RWY 29 ST LOUIS LAMBERT INTL (STL)

🔻 For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 30L/R. Use of FD or AP providing RNAV track guidance required during simultaneous operations. GPS required. For inop ALS, increase RNP 0.12 all Cats visibility to RVR 6000, increase RNP 0.17 all Cats visibility to 1½, and increase RNP 0.30 all Cats visibility to 1¾.

MISSED APPROACH: Climb ALSF-2 to 1100 then climbing left turn to 3000 direct HULSO and hold.

**D-ATIS** 125,025 379.925

NC-3,

27 JAN 2022

ō


24 FEB

ST. LOUIS APP CON

ST. LOUIS TOWER 132,475 239,275

**GND CON** 121.9 348.6 (Inbound) 121.65 377.175 (Outbound)

**CLNC DEL CPDLC** 

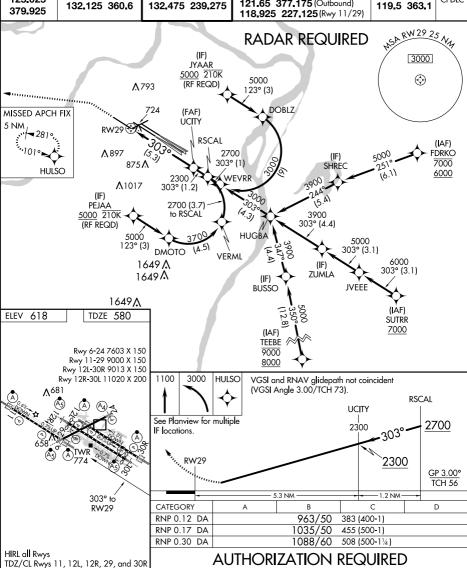

ST. LOUIS, MISSOURI Orig-B 17AUG17

ST LOUIS LAMBERT INTL  $(\mathrm{STL})$ RNAV (RNP) Z RWY 29