
HOUSTON, TEXAS LAAS 9000 Rwy Idg APP CRS CH 21484 TDŹE 96 267° RPI GOND Apt Elev 96 V For inop ALSF, increase GLS all Cats visibility to RVR 4000. DME/DME RNP-0.3 NA. GPS required. Simultaneous approach authorized with Rwy 26L A NA and Rwy 27. Use of FD or AP providing RNAV track guidance required during simultaneous operations. Autoland approach NA. HOUSTON APP CON D-ATIS

GLS RWY 26R GEORGE BUSH INTCNTL/HOUSTON (TAH)


> ALSF-2 MISSED APPROACH: Climb to 600 then climbing right turn to 3000 direct PEPBI and hold.


HOUSTON TOWER GND CON CLNC DEL 120.05 379.1 EAST **CPDLC** 124.05 120.72 290.2 121.7 128,1 124.35 316.15 WEST

2049



RADAR REQUIRED

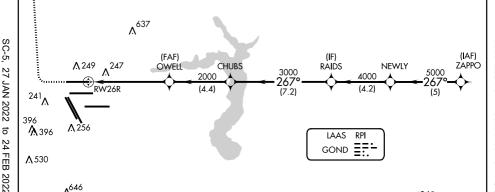

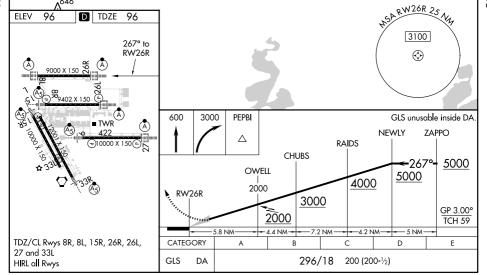

HOUSTON, TEXAS Amdt 1B 07DEC17 GEORGE BUSH INTCNTL/HOUSTON (IAH)GLS RWY 26R