CAT CDE vis to 1% miles.

AL-436 [USAF] * When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile,

ALSF-1

MISSED APPROACH: Climbing left turn to 2000 to GLIDR and hold.

EGLIN APP CON ATIS * 281.45 271° 089° 134.625 273.5 360.6 090° 270° 132.1

EGLIN TOWER 118.2 353.65


GND CON 121.8 335.8

CLNC DEL 127.7 377.2

DME/DME RNP-0.3 NA

Procedure not usable at times due to restricted area activity.

Aircraft holding in excess of 230 KIAS require RADAR monitoring.

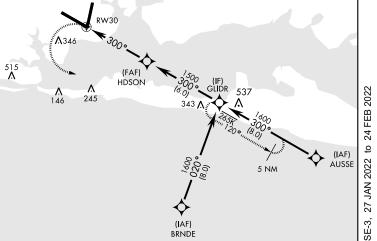




RW30

1800

 \Diamond



175 255 **☆**164 202 ↑ TWR 193 243 ۸ ₃₄₆ 300° to RW30

THRE

49

VALPARAISO, FLORIDA

30°29′N-86°32′W

EGLIN AFB/DESTIN-FT WALTON BEACH (KVPS)

HIRL all Rwy

84

ELEV

† Rwy 19 apch lgt 1500' nonstandard.