





LOC I-MZR	APP CRS	Rwy Idg	7504
109.5	222°	TDZE	78
		Apt Elev	79

ILS or LOC RWY 22

MONROE RGNL (MLU)

DME or RADAR required for procedure entry.		MALSR 	MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold, continue climb-in-hold to 3000.
	Circling Rwy 14 NA at night. For inop ALS, increase S-LOC 22 Cat C/D visibility to 1% SM.		
ASR	# DME from MLU VORTAC.		

ATIS	MONROE APP CON *	MONROE TOWER *	GND CON	CLNC DEL	UNICOM
125.05	118.15 290.475	118.9 (CTAF) 257.8	121.9	121.65	122.95

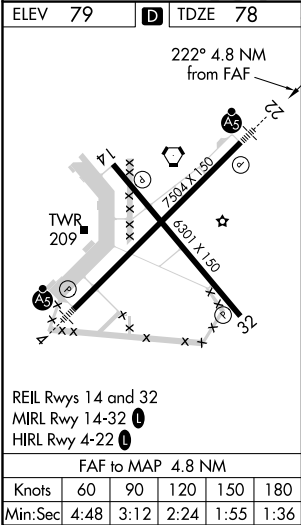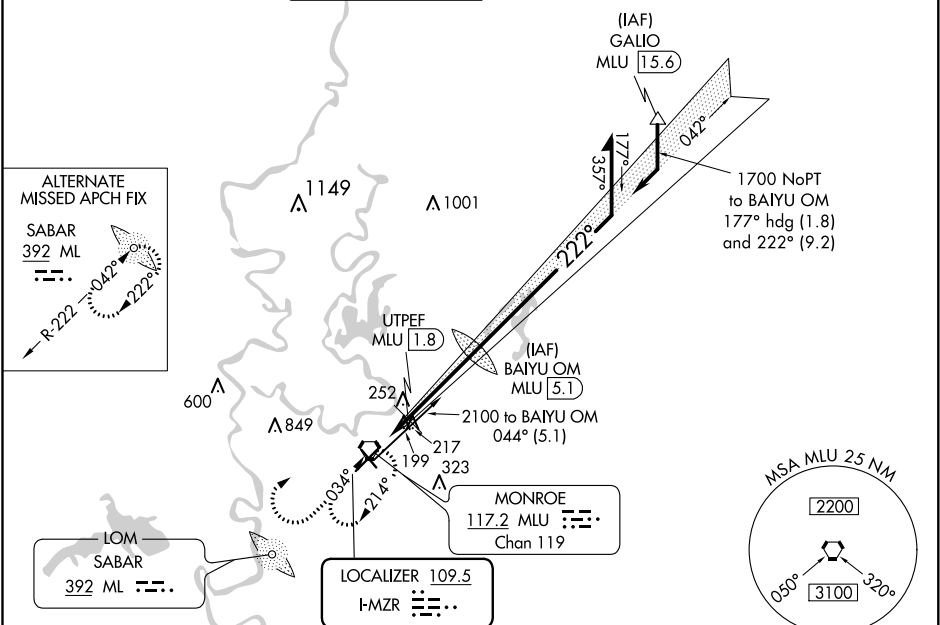

ELEV 79	D	TDZE 78
1800	3000	MLU
*LOC only.		
1675	1700	2100
042°	222°	042°
1.4 NM	3.4 NM	
560*		
UTPEF MLU 1.8		
BAIYU OM MLU 5.1		
GS 3.00°		TCH 54
222° 4.8 NM from FAF		
TWR 209		
REIL Rws 14 and 32		
MIRL Rwy 14-32		
HIRL Rwy 4-22		
FAF to MAP 4.8 NM		
Knots	60	90 120 150 180
Min:Sec	4:48	3:12 2:24 1:55 1:36