

APP CRS	Rwy Idg	10591
078°	TDZE	1118
	Apt Elev	1135



RNAV (RNP) Z RWY 8
PHOENIX SKY HARBOR INTL (PHX)

GPS required. Visibility reduction by helicopters NA.
For uncompensated Baro-VNAV systems, procedure NA below 1°C (34°F) or above 46°C (116°F).
For inoperative MALSF, increase RNP 0.13 all Cats visibility to 1¼, and RNP 0.30 all Cats visibility to 1¾.

MALSF

MISSED APPROACH: Climb to 5000 via track 078° to YOKXO and via track 114° to IWA VORTAC and hold.

D-ATIS	PHOENIX APP CON	PHOENIX TOWER	GND CON	CLNC DEL	CPDLC
127.575	128.65 353.9	118.7 278.8 (Rwy 8-26) 120.9 254.3 (Rwy 7L-25R, 7R-25L)	119.75 269.2 (N) 132.55 269.2 (S)	118.1 269.2	

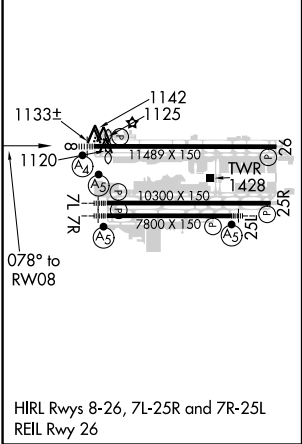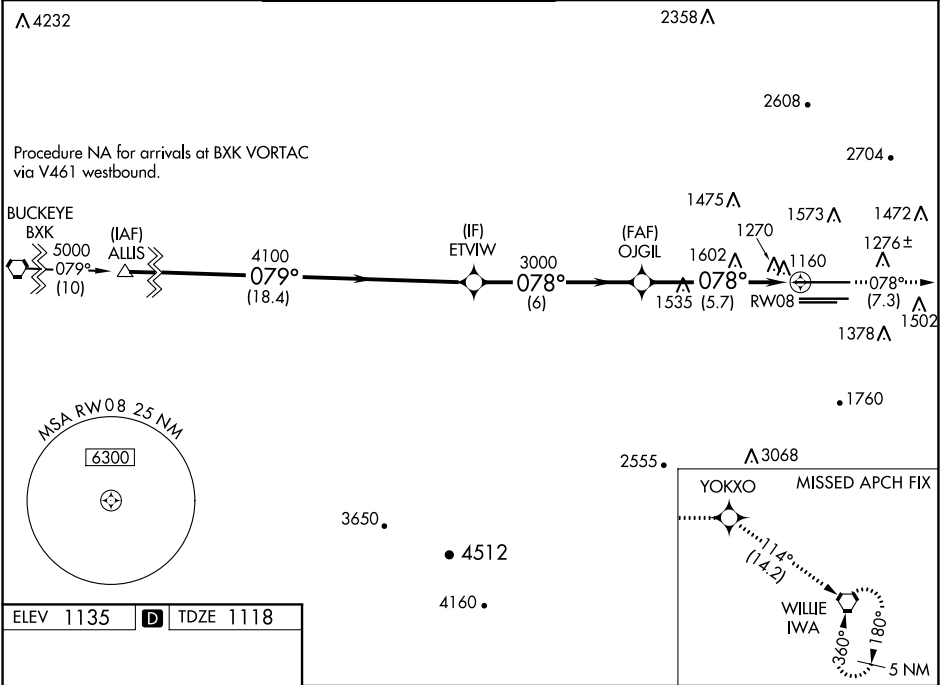

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 69°).				
ALLIS	Procedure Turn NA	ETVIW	OJGIL	RWY 08
5000	078°	4100	078°	3000
GP 3.00° TCH 54	18.4 NM	6 NM	5.7 NM	
CATEGORY	A	B	C	D
RNP 0.13 DA	1478-1 360 (400-1)			
RNP 0.30 DA	1603-1½ 485 (500-1½)			

AUTHORIZATION REQUIRED

SW-4, 27 JAN 2022 to 24 FEB 2022

SW-4, 27 JAN 2022 to 24 FEB 2022