

WAAS CH 61319 W11A	APP CRS 106°	Rwy Idg 9800 TDZE 4 Apt Elev 4
--	------------------------	---

RNAV (GPS) Y RWY 11


LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALSF-2, increase LNAV/VNAV all Cats visibility to RVR 4000.


ALSF-2

MISSED APPROACH: Climb to 2000 direct ZUBEL and on track 195° to SAFES and hold.


D-ATIS	NEW ORLEANS APP CON	NEW ORLEANS TOWER	GND CON	CLNC DEL	CPDLC
127.55	WEST 125.5 350.35 EAST 133.15 290.3	119.5 254.3	121.9 273.525	120.925	

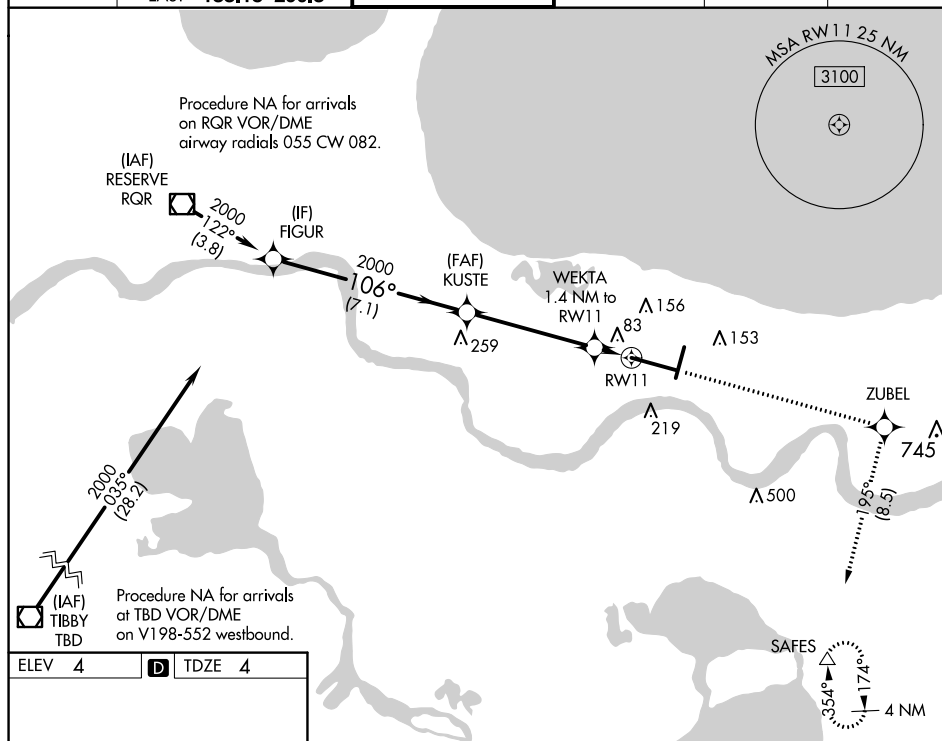

ELEV	4		TDZE	4
------	---	---	------	---



RLS Rwy 2
TDZ/CL Rwy 11
HIRL All Runways

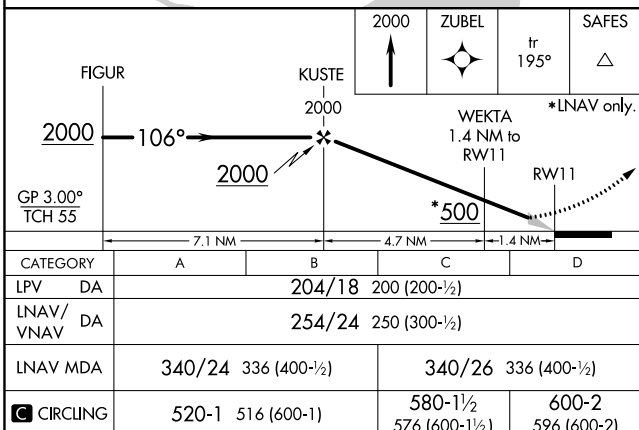

RNAV (GPS) Y RWY 11