



For inop MALSR, increase S-LDA/GS 6 all Cats visibility to ¾ mile.
Missed approach requires a minimum climb of 350 feet per NM to 3600, if unable to meet climb gradient, see LDA Y Rwy 6.

✈️-13°C

MALSR

MISSED APPROACH: Climb to 1800 then climbing right turn to 5000 on ODR VOR R-155 to PARTE INT/LYH 28.6 DME and hold, continue climb-in-hold to 5000.

ATIS 132.375	ROANOKE APP CON 126.9 339.8	ROANOKE TOWER 118.3 257.8	GND CON 121.9 257.8	CLNC DEL 119.7
------------------------	---------------------------------------	-------------------------------------	-------------------------------	--------------------------

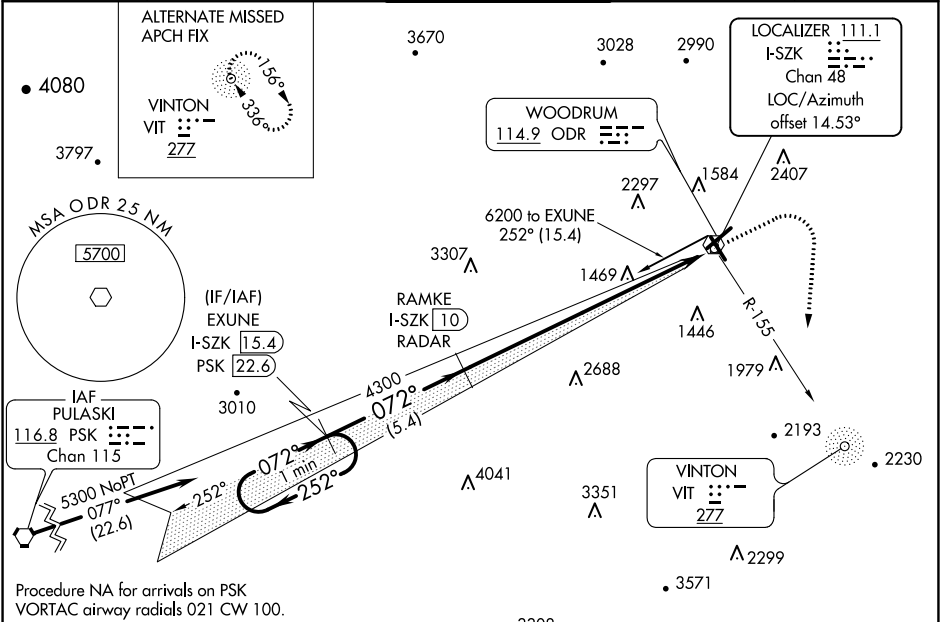

LDA/GLIDE SLOPE
DME OR RADAR REQUIRED

One Minute Holding Pattern

VGS1 and LDA glidepath not coincident (VGS1 Angle 3.00/TCH 58).


EXUNE I-SZK 15.4

RAMKE I-SZK 10 RADAR

5300 ← 252° → 072° → 4300

GS 3.00° TCH 55

5.4 NM 9.7 NM

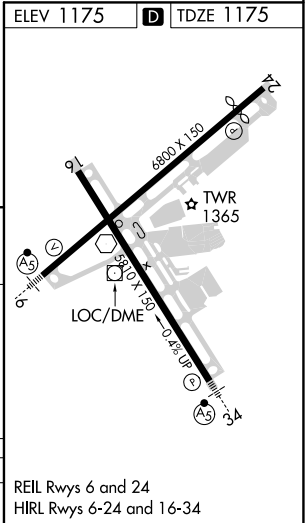

CATEGORY	A	B	C	D
S-LDA/GS 6	1425-¾	250 (300-¾)		