

WAAS CH 72908 W19B	APP CRS 191°	Rwy Idg 10801 TDZE 989 Apt Elev 1026
--	------------------------	---

RNAV (GPS) Y RWY 19R
KANSAS CITY INTL (MCI)


V DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 19L. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). For inop ALSF, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 5000 and LNAV Cat E visibility to RVR 6000. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2



MISSED APPROACH: Climb to 2000 then climbing right turn to 4000 direct RUGBB and hold.

D-ATIS 128.375	KANSAS CITY APP CON 120.95 318.1	INTERNATIONAL TOWER 128.2 254.25	GND CON 121.8	CLNC DEL 135.7	CPDLC
--------------------------	--	--	-------------------------	--------------------------	-------

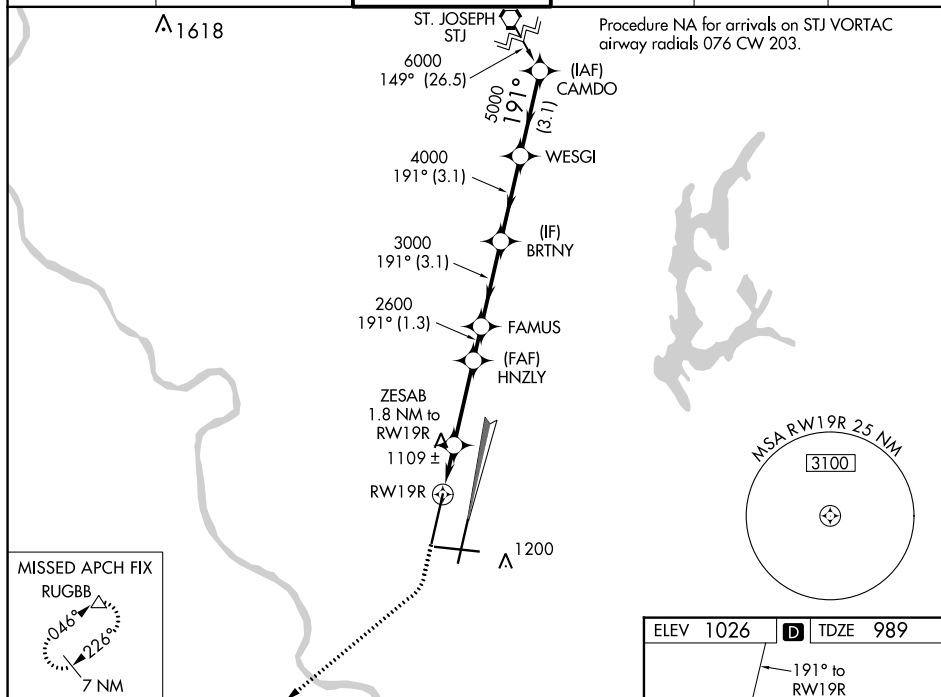

NC-3, 27 JAN 2022 to 24 FEB 2022

NC-3. 27 JAN 2022 to 24 FEB 2022

