
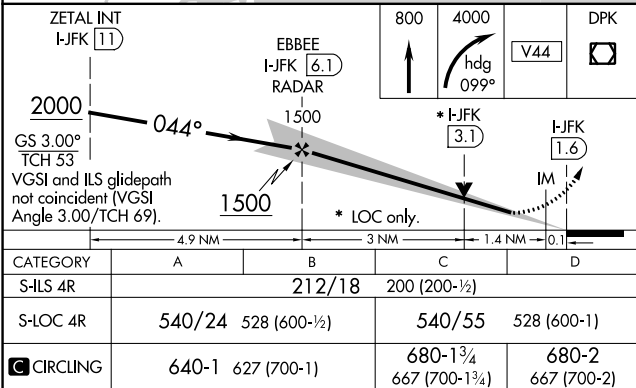


RADAR required for procedure entry.			ALSF-2	MISSED APPROACH: Climb to 800 then climbing right turn to 4000 heading 099° and V44 to DPK VOR/DME and hold.		
Simultaneous approach authorized.						
D-ATIS (ARR/DEP) (ARR-NE) (ARR-SW)		NEW YORK APP CON	KENNEDY TOWER		GND CON	CLNC DEL
128.725 117.7 115.4		128.125 269.0	Rwys 4R/22L and 13L/31R 119.1 281.55		121.9	135.05
			Rwys 4L/22R and 13R/31L 123.9 281.55		348.6	348.6
					CPDLC	

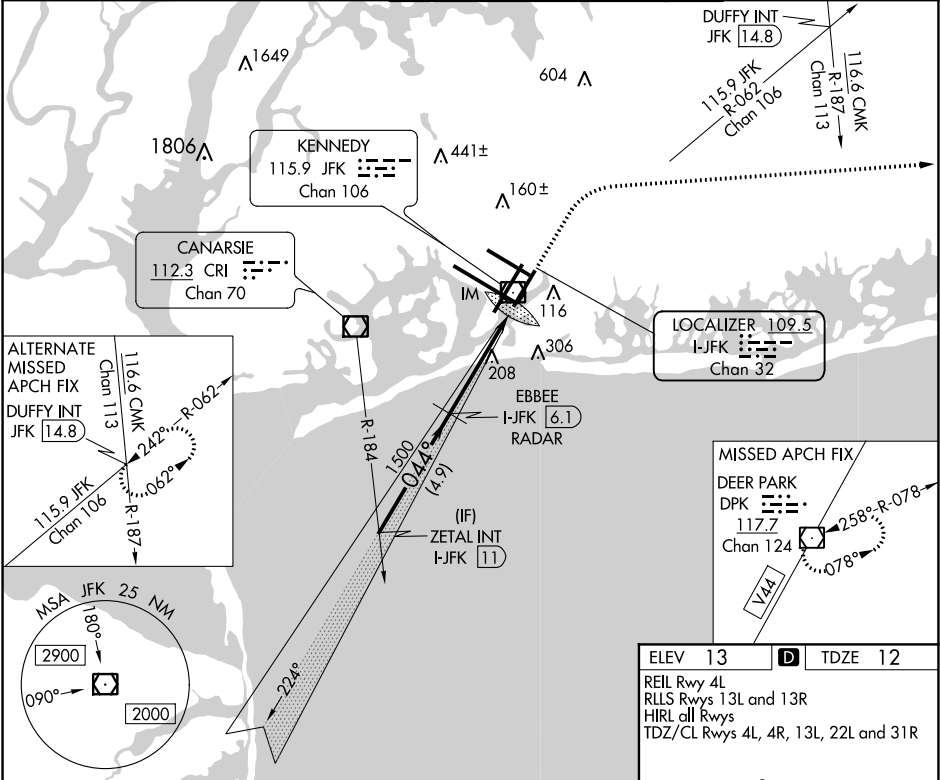

ELEV 13	D	TDZE 12
REIL Rwy 4L		
RLS Rwys 13L and 13R		
HIRL all Rwys		
TDZ/CL Rwys 4L, 4R, 13L, 22L and 31R		
FAF to MAP 4.5 NM		
Knots	60	90 120 150 180
Min:Sec	4:30	3:00 2:15 1:48 1:30