

WAAS CH 90124 W31A	APP CRS 308°	Rwy Idg TDZE Apt Elev	7000 590 597
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 31
ABRAHAM LINCOLN CAPITAL (SPI)



V DME/DME RNP-0.3 NA. Baro-VNAV NA below -16°C (4°F). When local
A altimeter setting not received, use Lincoln altimeter setting: increase all DA 57
ASR feet and MDA 60 feet, increase Circling Cat C and D visibility $\frac{1}{4}$ SM. VDP and
Baro-VNAV NA when using Logan County altimeter setting. For inoperative MALSR,
increase LPV visibility to $\frac{3}{4}$ all Cats, increase LNAV/VNAV Cat D visibility to 1.

MALSR




MISSED APPROACH:
Climb to 2500 direct
JOPOD and hold.

ATIS	SPRINGFIELD APP CON ★	SPRINGFIELD TOWER ★	GND CON	CLNC DEL	UNICOM
127.65 270.1	126.15 323.0	121.3 (CTAF) 0 257.8	121.9 348.6	121.7	122.95

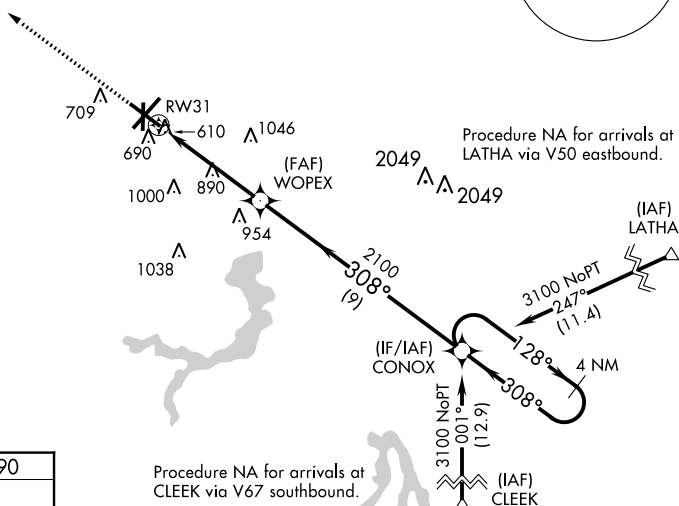

ELEV 597		TDZE 590
----------	---	----------



MIRL Rwy 18-36
REIL Rwy 13 **L**
s 4-22 and 13-31 **L**

2500 JOPOD

2100 WOPEX

3100 CONOX

4 NM Holding Pattern

128°

308°

3100

GP 3.00° TCH 55

1.8 NM

2.8 NM

9 NM

*LNAV only.

*1.8 NM to RW31

RW31