# RNAV (GPS) RWY 19
## SAVANNAH/HILTON HEAD INTL (SAV)

| WAAS CH 97314 W19A | APP CRS 186° | Rwy ldg 7002 TDZE 47 Apt Elev 50 |
|---|---|---|

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Hilton Head Island altimeter setting and increase all DA 65 feet and all MDA 80 feet; increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cats C/D, and Circling Cats C/D visibility ¼ SM. VDP and Baro-VNAV NA when using Hilton Head Island altimeter setting.

MISSED APPROACH: Climb to 2500 direct TERBE and hold.

| ATIS | SAVANNAH APP CON★ | SAVANNAH TOWER★ | GND CON | CLNC DEL | UNICOM |
|---|---|---|---|---|---|
| 123.75 | 125.3 371.875 | 119.1 (CTAF) L 257.8 | 121.9 348.6 | 119.55 291.775 | 122.95 |

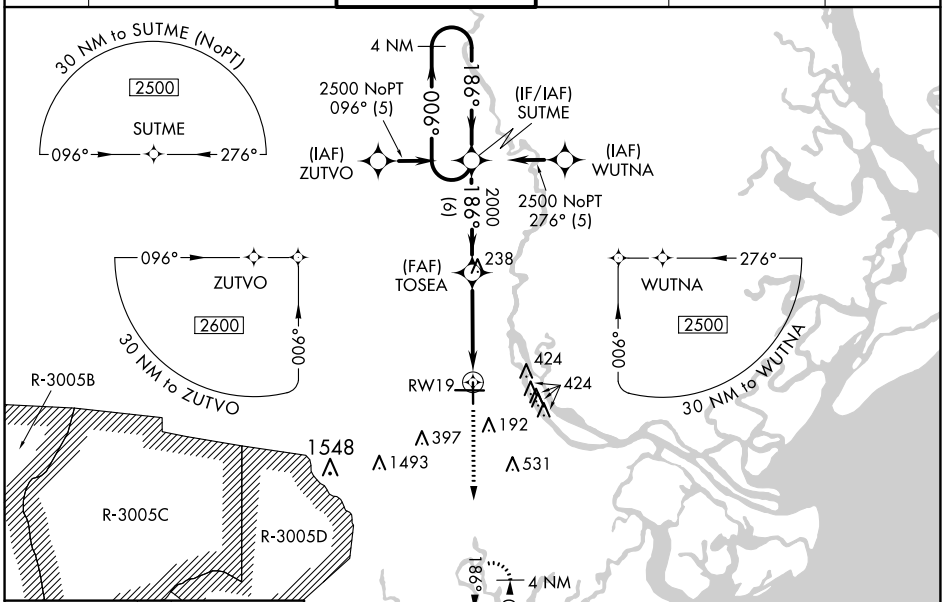


ELEV 50 | D | TDZE 47




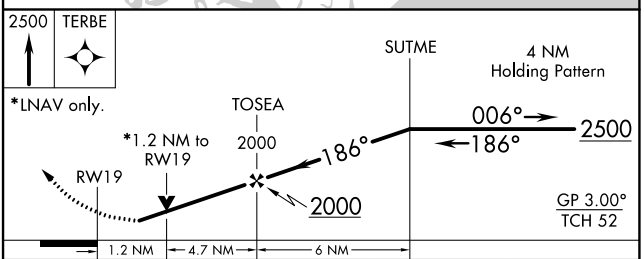


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 312-1 265 (300-1) | | | |
| LNAV/VNAV DA | 466-1½ 419 (500-1½) | | | |
| LNAV MDA | 480-1 433 (500-1) | | 480-1¼ 433 (500-1¼) | 480-1½ 433 (500-1½) |
| C CIRCLING | 520-1 470 (500-1) | | 740-2 690 (700-2) | 740-2¼ 690 (700-2¼) |

TDZ/CL Rwy 10
REIL Rwys 19 and 28 L
HIRL Rwys 1-19 and 10-28 L

SE-4, 27 JAN 2022 to 24 FEB 2022

SE-4, 27 JAN 2022 to 24 FEB 2022