


VORTAC SPI	APP CRS	Rwy Idg	7000
112.7	296°	TDZE	590
Chan 74		Apt Elev	598

VOR/DME RWY 31
ABRAHAM LINCOLN CAPITAL (SPI)



⚠ When local altimeter setting not received, use Lincoln altimeter setting and increase all MDA 60 feet; increase S-31 Cat C/D visibility 1/8 mile and Circling Cat C/D visibility 1/4 mile. For inoperative MALS, increase S-31 Cat C/D visibility to 1 1/4 mile. When using Lincoln altimeter setting increase S-31 Cat C/D visibility to 1 1/8 mile. VDP NA with Lincoln altimeter setting.

MALS



MISSED APPROACH: Climb to 1500 then climbing right turn to 2500 on SPI VORTAC R-314 to ULAXY/SPI 11.6 DME and hold.

ATIS	SPRINGFIELD APP CON ★	SPRINGFIELD TOWER ★	GND CON	CLNC DEL	UNICOM
127.65 270.1	126.15 323.0	121.3 (CTAF) 257.8	121.9 348.6	121.7	122.95

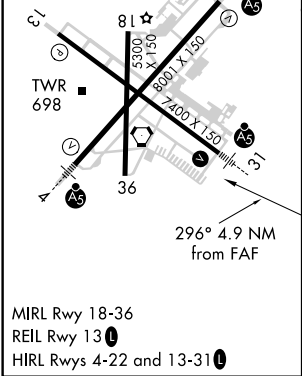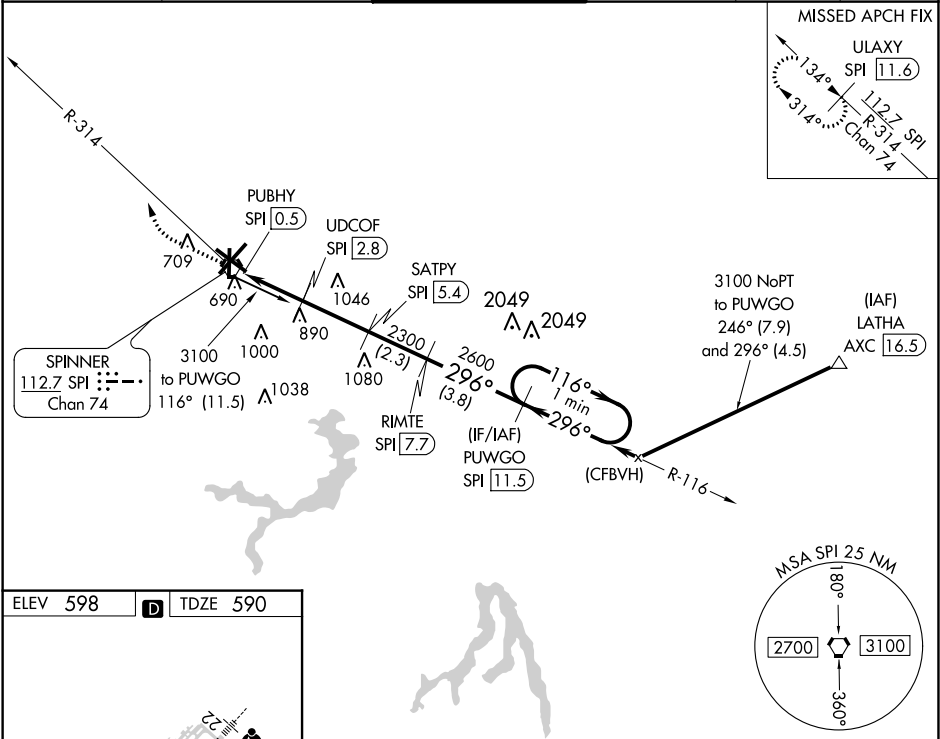

1500	2500	ULAXY SPI 11.6	PUWGO SPI 11.5	One Minute Holding Pattern
SPI R-314	UDCOF SPI 2.8	SATPY SPI 5.4	RIMTE SPI 7.7	
PUBHY SPI 0.5	SPI 2.2	3.18° TCH 54	2300	116° 3100
1420	2600	296°	296°	
1.8	0.5	2.6 NM	2.3 NM	3.8 NM
CATEGORY	A	B	C	D
S-31	1200-1/2 610 (700-1/2)		1200-1 3/8 610 (700-1 3/8)	
CIRCLING	1200-1 602 (700-1)		1360-2 1/4 762 (800-2 1/4)	1380-2 1/2 782 (800-2 1/2)

EC-3, 27 JAN 2022 to 24 FEB 2022

EC-3, 27 JAN 2022 to 24 FEB 2022