


RNAV (RNP) Z RWY 1L
WICHITA DWIGHT D EISENHOWER NTL (ICT)


▼ Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -15°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 5500.

MISSED APPROACH:
Climb to 4200 on track 016°
to ACUBO and hold.

ATIS 125.15	WICHITA APP CON 126.7 353.5	WICHITA TOWER 118.2 257.8	GND CON 121.9 348.6	CLNC DEL 125.7
----------------	--------------------------------	------------------------------	------------------------	-------------------

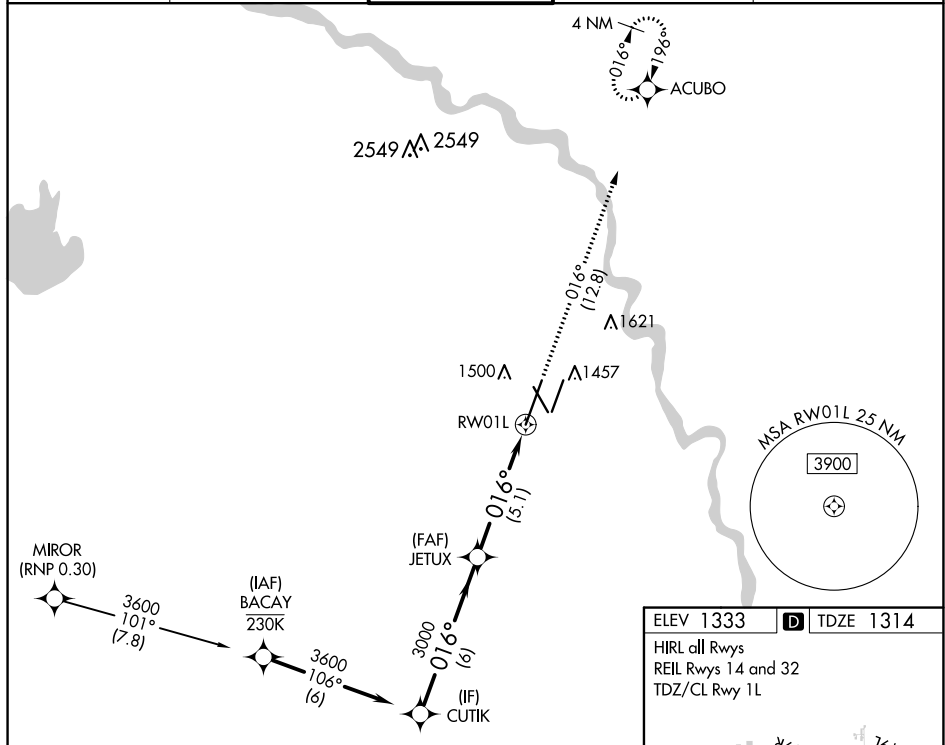

Technical drawing of a roof profile. The profile is labeled with 'GP 3.00° TCH 52' and 'RW01L'. The profile has a slope of 016°. The drawing includes dimensions: 3600, 3000, 6 NM, and 5.1 NM. The profile is divided into four sections labeled A, B, C, and D. The drawing also includes a north arrow and a scale bar.

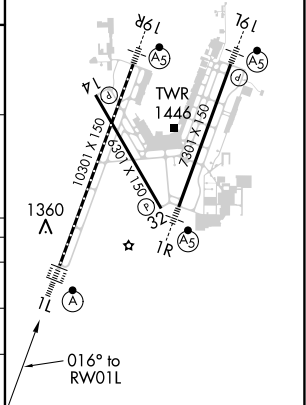

NC-2. 27 JAN 2022 to 24 FEB 2022