
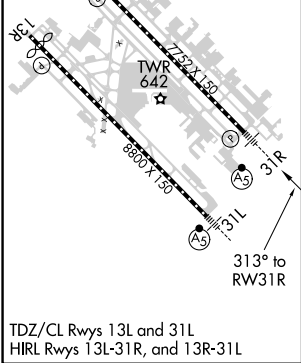



APP CRS	Rwy Idg	6952
313°	TDZE	487
	Apt Elev	487

RNAV (RNP) Z RWY 31R
DALLAS LOVE FLD (DAL)

RNP AR APCH	MALSR	MISSED APPROACH: Climb to 900 then climbing right turn to 5000 direct FINGR and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). Use of FD or AP providing RNAV track guidance required during simultaneous operations. Simultaneous approach authorized.		

D-ATIS	REGIONAL APP CON	LOVE TOWER	GND CON	CLNC DEL	CPDLC
120.15	NORTH 124.3 282.275 SOUTH 125.2 343.65	123.7 239.3	121.75 348.6	127.9	

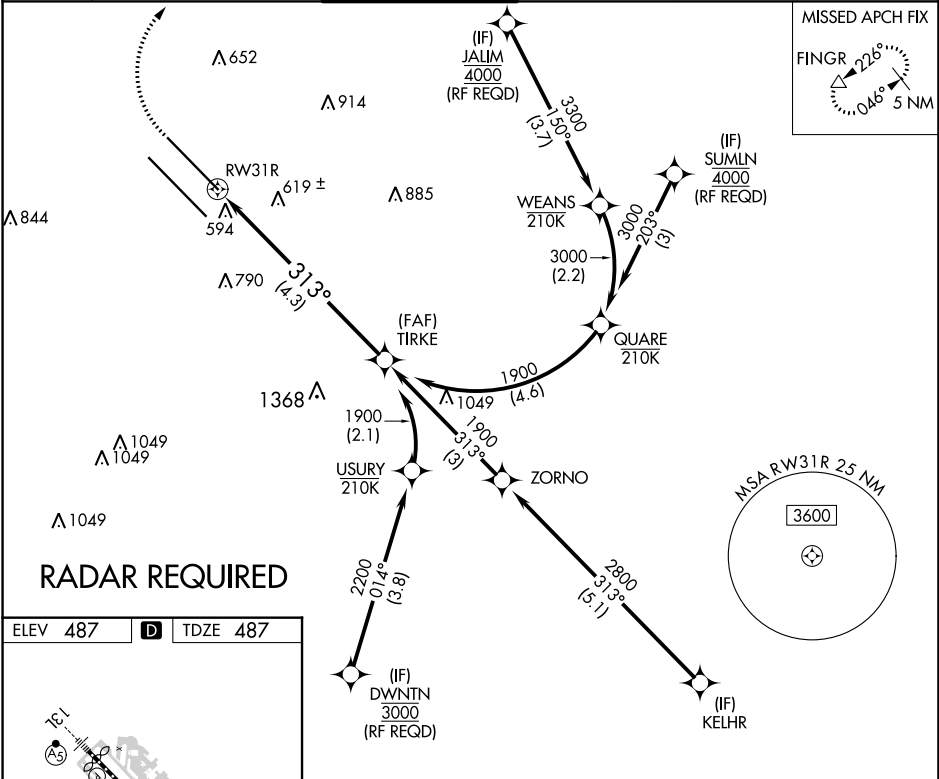

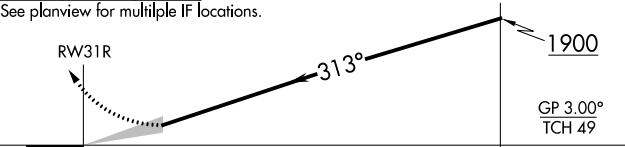900	5000	FINGR	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 55)	
↑	↗	△		
See planview for multiple IF locations.				
				
CATEGORY	A	B	C	D
RNP 0.16 DA		796/24	309 (400-½)	
RNP 0.30 DA		895/45	408 (500-¾)	
AUTHORIZATION REQUIRED				