

WAAS CH 97515 W13A	APP CRS 132°	Rwy Idg TDZE 46 Apt Elev 46
--	------------------------	---

RNAV (GPS) Y RWY 13



CORPUS CHRISTI INTL (CRP)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSR increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 4500, and LNAV Cats C/D/E visibility to RVR 5500. **RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 500 then climbing right turn to 2000 direct SOLON and hold.

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15	CLNC DEL 118.55
----------------------	--	------------------------------------	--------------------------------	---------------------------

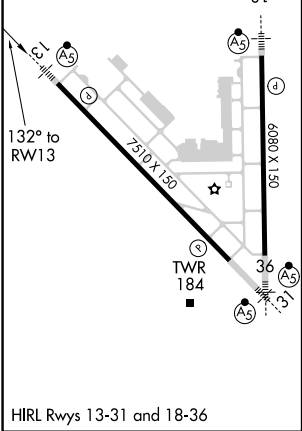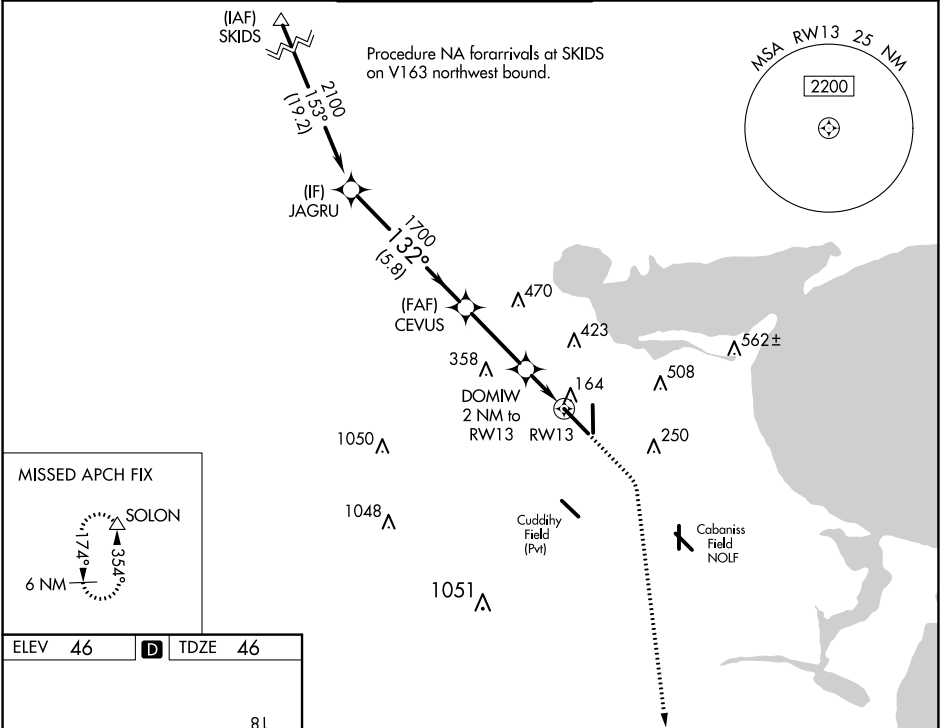

JAGRU		CEVUS		DOMW 2 NM to RWY 13		RWY 13	
2100		1700		*720		*1 NM to RWY 13	
GP 3.00° TCH 50		*720		*1 NM to RWY 13		*1 NM to RWY 13	
5.8 NM		3 NM		1 NM		1 NM	
CATEGORY		A		B		C	
LPV DA**		246/24		200 (200-½)			
LNAV/VNAV DA		325/24		279 (300-½)			
LNAV MDA		420/24		374 (400-½)		420/35 374 (400-½)	
CIRCLING		500-1 454 (500-1)		580-1 534 (600-1)		820-2¼ 774 (800-2¼)	