

APP CRS
138°

Rwy Idg
TDZE
Apt Elev

6059
611
620

RNAV (RNP) Y RWY 13C


CHICAGO MIDWAY INTL (MDW)

⚠

For uncompensated Baro-VNAV systems, procedure NA below -19°C (-2°F) or above 54°C (130°F). RF required. GPS required. Night landing: Rwy 13C Cat C and D operational VGSIs required, remain on or above VGSIs glidepath until threshold.

MISSED APPROACH: Climb to 1100 then climbing right turn to 2600 direct EON VORTAC and hold.

D-ATIS 132.75	CHICAGO APP CON 128.2 353.875	MIDWAY TOWER 135.2 269.125	GND CON 121.65	CLNC DEL 124.625	CPDLC
------------------	----------------------------------	-------------------------------	-------------------	---------------------	-------

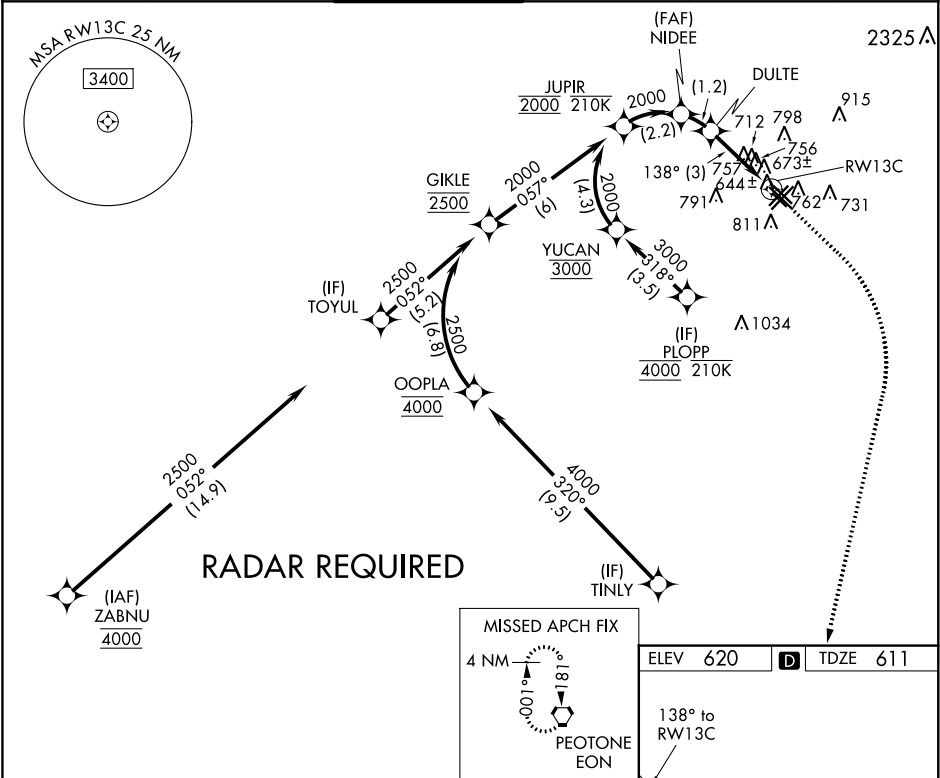

See planview for multiple IF locations.

JUPIR 2000

NIDEE 2000

DULTE 1609

RW13C

GP 3.00°

TCH 46

2.2 NM

1.2 NM

3 NM

CATEGORY	A	B	C	D
RNP 0.11 DA		891/50	280 (300-1)	
RNP 0.18 DA		997-1¼	386 (400-1¼)	
RNP 0.30 DA		1049-1½	438 (500-1½)	

AUTHORIZATION REQUIRED

HIRL Rws 13C-31C and 4R-22L
MIRL Rws 4L-22R, 13L-31R, and 13R-31L
REIL Rws 4R, 22L, and 31C
RLS Rws 13C and 31C