


RNP APCH - GPS.				MISSED APPROACH: Climb to 500 then climbing right turn to 3000 direct MORGA and hold.			
▼ For uncompensated Baro-VNAV systems, procedure NA below 6°C or above 54°C.							
D-ATIS	PALM BEACH APP CON		PALM BEACH TOWER		GND CON		CLNC DEL
123.75	128.3 317.4		119.1 257.8		121.9 284.6		121.6 284.6

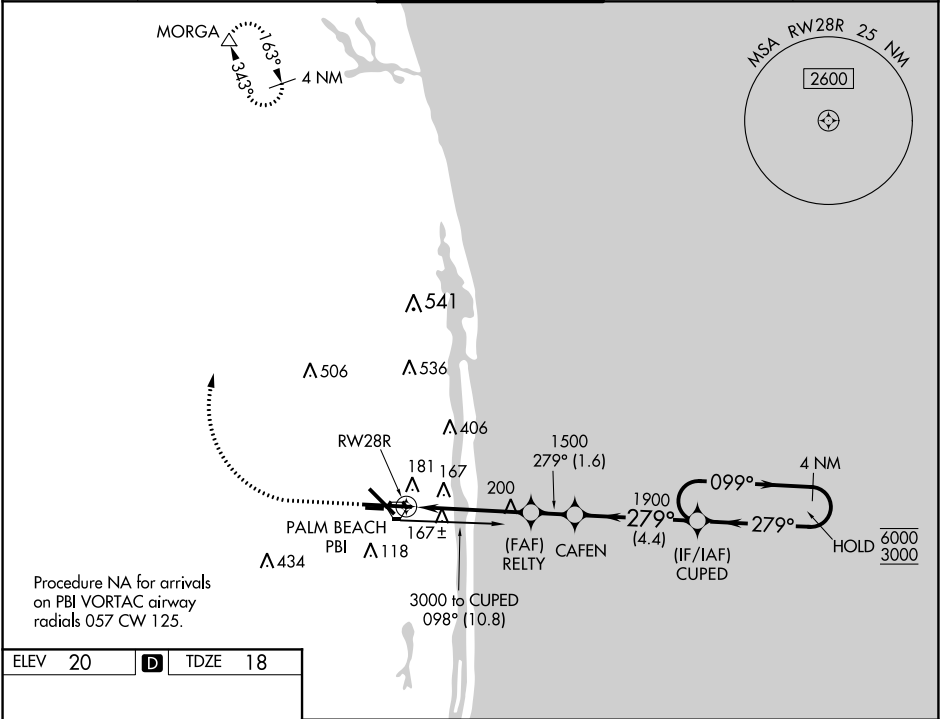

10L
10R
28L
28R

3214 X 75

10001 X 150

TWR 248 ±

279° to RW28R

500
↑

3000
↷

MORGA
△

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).

4 NM Holding Pattern

CUPED

099° → 6000
← 279° 3000

279°

1900

RELTY 1500

1.2 NM to RWY28R

1500

CAFEN

1.2 3.3 1.6 4.4 NM

GP 3.00° TCH 58

CATEGORY	A		B	C	D
LPV DA	218/40		200 (200-¾)		
LNAV/VNAV DA	342/50		324 (400-1)		
LNAV MDA	460/55	442 (500-1)		460-1⅓	442 (500-1⅓)
C CIRCLING	560-1	540 (600-1)		740-2 720 (800-2)	780-2½ 760 (800-2½)

HIRL Rwy 10L-28R

REIL Rwys 10R, 14, 28L, 28R and 32

MIRL Rwys 14-32 and 10R-28L