

WAAS CH <b>53635</b> <b>W18A</b>	APP CRS <b>175°</b>	Rwy Idg <b>6080</b> TDZE <b>42</b> Apt Elev <b>46</b>
--	------------------------	---

RNAV (GPS) RWY 18


CORPUS CHRISTI INTL (CRP)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C (34°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.  
For inop MALSR increase LPV Cat E visibility to ¾ mile, LNAV/VNAV Cat E visibility to 1 mile and LNAV Cat C/D/E visibility to ¾ mile.


MALSR

MISSED APPROACH: Climb to 500 then climbing left turn to 2000 direct SOLON and hold.

ATIS <b>126.8</b>	CORPUS APP CON <b>120.9 348.725</b>	CORPUS TOWER <b>119.4 257.8</b>	GND CON <b>121.9 269.15</b>	CLNC DEL <b>118.55</b>
----------------------	--	------------------------------------	--------------------------------	---------------------------

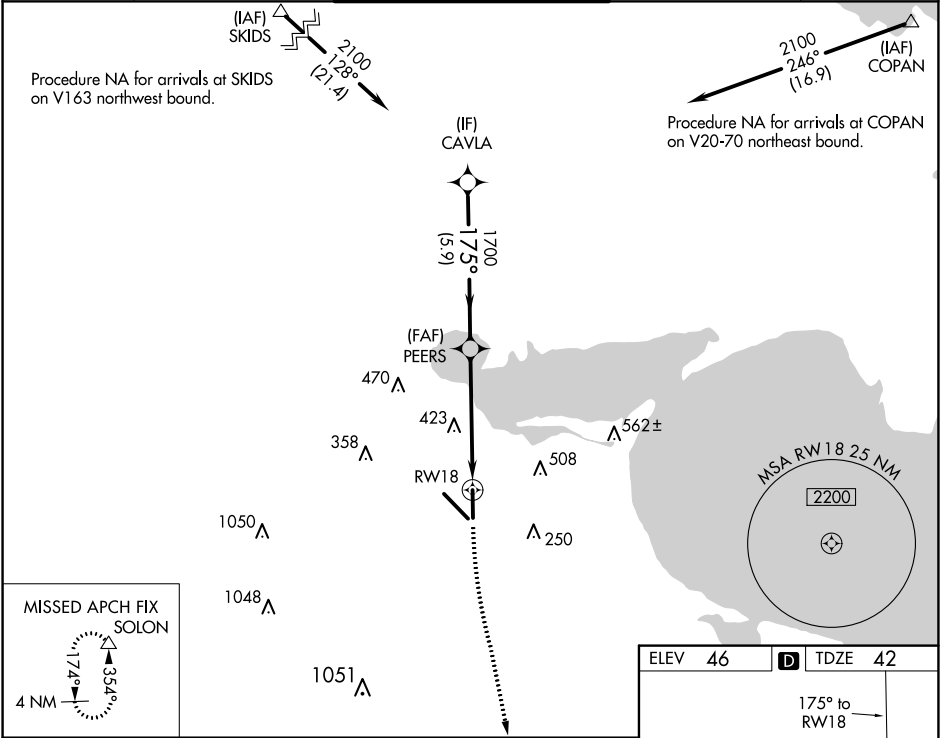

CAVLA		PEERS		RW18	
2100		1700		500	
175°		1700		2000	
GP 3.00°		*1.8 NM to RW18		*LNAV only.	
TCH 50		3.3 NM		SOLON	
5.9 NM		1.8 NM			
CATEGORY	A	B	C	D	E
LPV DA	242-½		200 (200-½)		
LNAV/VNAV DA	345-½		303 (300-½)		
LNAV MDA	660-½	618 (700-½)	660-1⅜ 618 (700-1⅜)		
CIRCLING	660-1	614 (700-1)	820-2¼ 774 (800-2¼)	820-2½ 774 (800-2½)	820-2¾ 774 (800-2¾)

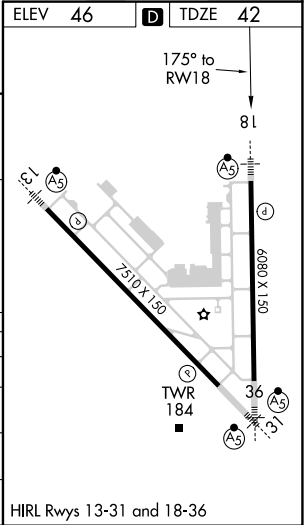

SC-3, 27 JAN 2022 to 24 FEB 2022

SC-3, 27 JAN 2022 to 24 FEB 2022