

APP CRS
064°

Rwy Idg
TDZE
Apt Elev

7603
551
618

RNAV (GPS) RWY 6
ST LOUIS LAMBERT INTL (STL)

RNP APCH.


▼

WAAS VNAV NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS increase LNAV/VNAV Cat E visibility to 1½ SM and LNAV Cats C/D/E visibility to 1¾ SM.

MALSR

MISSED APPROACH: Climb to 3000 direct VELVT and hold, continue climb-in-hold to 3000.

D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 132.475 239.275	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	CLNC DEL 119.5 363.1	CPDLC
--	---	---	---	--------------------------------	-------

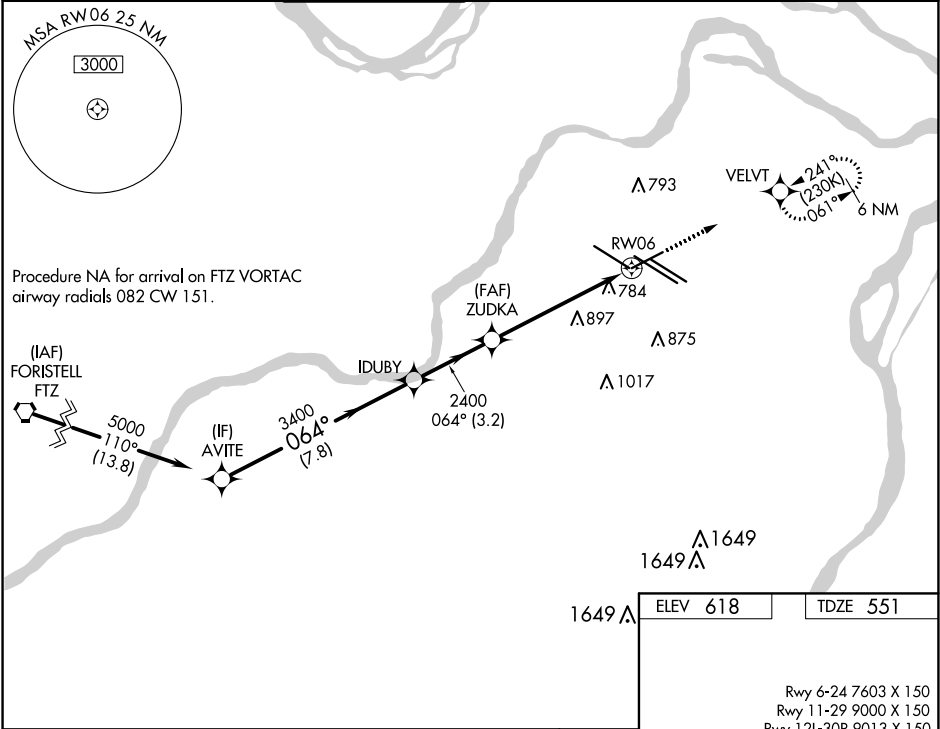

AVITE

IDUBY

ZUDKA

RW06

3000

VELVT

*LNAV only

5000

064°

3400

2400

2400

*1.4 NM to RW06

GP 3.00° TCH 50

7.8 NM

3.2 NM

4.3 NM

1.4

CATEGORY	A	B	C	D	E
LNAV/VNAV	DA	1103/60 552 (500-1¼)			
LNAV MDA	1040/24 489 (500-½)		1040/50 489 (500-1)		

HIRL all Rwys

TDZ/CL Rwys 11, 12L, 12R, 29, and 30R