


LOC/DME	I-RNI	APP CRS	Rwy Idg	9501
109.7		094°	TDZE	1015
Chan 34			Apt Elev	1026

ILS or LOC RWY 9

KANSAS CITY INTL (MCI)

Inop table does not apply to S-ILS 9. DME or RADAR required. For inop MALSR, increase S-LOC 9 Cat A/B visibility to RVR 5000 and Cat C/D visibility to 1½ mile.			MALSR	MISSED APPROACH: Climb to 4000 on MCI R-089 to LYMES INT/MCI 29.2 DME and hold.	
D-ATIS	KANSAS CITY APP CON	INTERNATIONAL TOWER	GND CON	CLNC DEL	CPDLC
128.375	120.95 318.1	128.2 254.25	121.8	135.7	

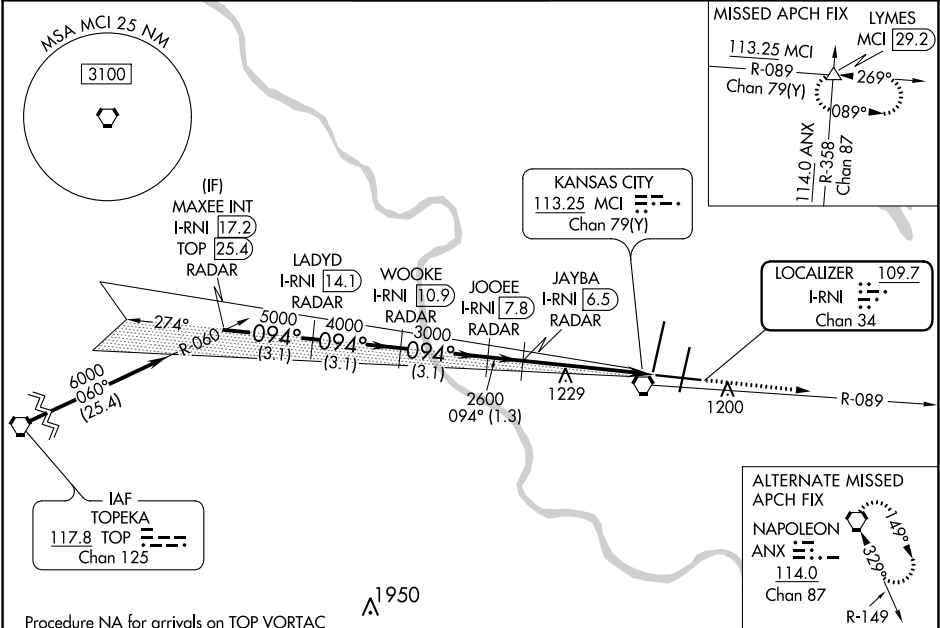

Procedure NA for arrivals on TOP VORTAC
airway radials 025 CW 107.

DME or RADAR REQUIRED

	MAXEE INT I-RNI 17.2 RADAR	LADYD I-RNI 14.1 RADAR	WOOKIE I-RNI 10.9 RADAR	JOOEE I-RNI 7.8 RADAR	JAYBA I-RNI 6.5 RADAR	4000 MCI R-089	LYMES △
	6000	5000	4000	3000	2600	*I-RNI 2.8 *LOC only	
	GS 3.00° TCH 56						
CATEGORY	A	B	C	D			
S-ILS 9	1265/40 250 (300-¾)						
S-LOC 9	1420/40 405 (400-¾)						
CIRCLING	1540-1	514 (600-1)	1540-1½	514 (600-1½)	1580-2	554 (600-2)	

