

LOC/DME I-JQX <b>108.9</b> Chan <b>26</b>	APP CRS <b>178°</b>	Rwy Idg <b>6499</b> TDZE <b>965</b> Apt Elev <b>978</b>
---	------------------------	---

ILS or LOC RWY 18  
JOPLIN RGNL (JLN)

ADF required. DME required for LOC only. RADAR required for procedure entry.



MALSFR



**MISSED APPROACH:** Climb to 1460 then climbing right turn to 3100 on LUNNS LOM bearing 177° to LUNNS LOM and hold, continue climb-in-hold to 3100. S-LS 18\* missed approach requires minimum climb of 204 feet per NM to 2240. (If unable to meet climb gradient use S-LS 18# minimums).

**T** For inop ALS, increase S-ILS 18# all Cats visibility  
**A** to RVR 4500 and S-LOC 18 Cat C/D visibility to  
RVR 5500.

ATIS <b>120.85</b>	KANSAS CITY CENTER <b>128.6 282.325</b>	JOPLIN TOWER★ <b>119.8 (CTAF) ①</b>	GND CON <b>121.6</b>	UNICOM <b>122.95</b>
-----------------------	--	--	-------------------------	-------------------------

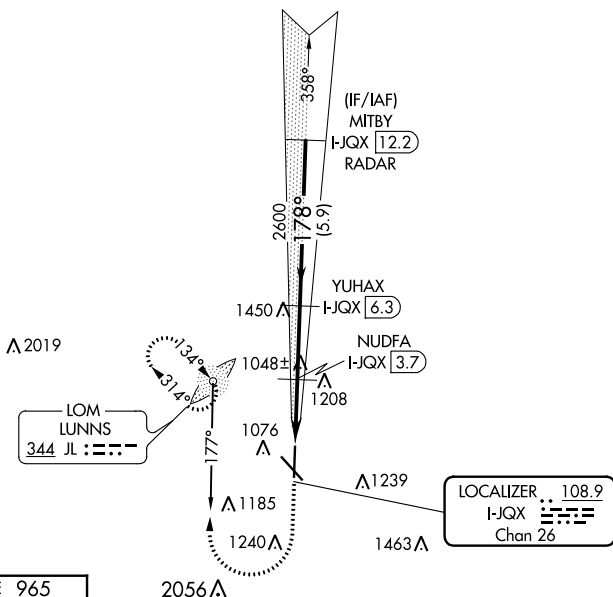

ELEV 978

178° 5 NM from FAF

81

6501 X 100

0.3% UP

TWR 1055

6501 X 150

0.5% UP

36

31

HIRL Rwy 13-31

HIRL Rwy 18-36

