


ILS or LOC RWY 21L


LOC I-SUU 110.1	APCH CRS 215°	Rwy Ldg 10,995 TDZE 58 Arpt Elev 63	AL-488 [USAF]	TRAVIS AFB (KSUU)
ATC RADAR required except for full approach from SAC.			ALSF-2	MISSED APPROACH: Climb straight ahead to SUU TACAN then turn right direct SGD VORTAC climbing to 4400. Expect further clearance prior to SGD.
* When ALS inop, increase all CATs RVR to 40, vis to ¾ miles. When TDZL/CL inop, increase RVR to 24.				
ATIS 135.55 292.125	APP CON 119.9 322.325 (S) 126.6 281.45 (N)	TOWER 120.75 254.4	GND CON 121.8 289.4	CLNC DEL 127.55 335.8

** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1 ¾ mile.


*** When Rwy 3R VGSi inop, circling to Rwy 3R not authorized at night.
Circling not authorized NW of Rwy 3L-21R.

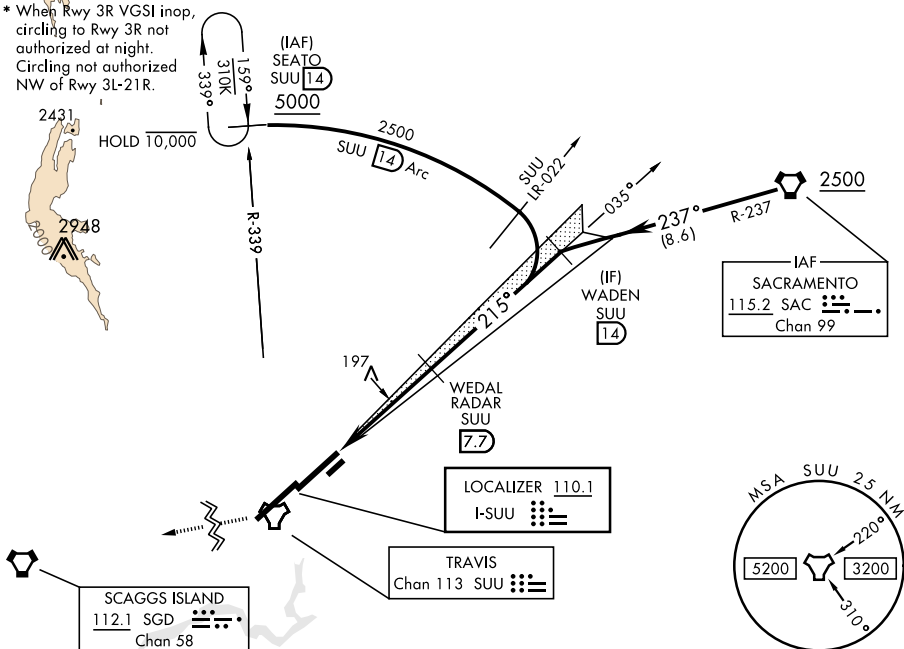

EMERG SAFE ALT 100 NM 12,600 FROM "SUU" TACAN

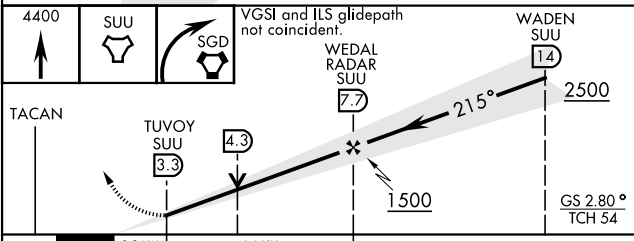

CATEGORY	A	B	C	D	E
S-ILS 21L*	258/18	200	(200-½)		
S-LOC 21L**	500/24 442 (500-½)	500/45 442 (500-¾)			
CIRCLING***	540-1 477 (500-1)	580-1 517 (600-1)	1100-3 1037(1100-3)	1200-3 1137 (1200-3)	

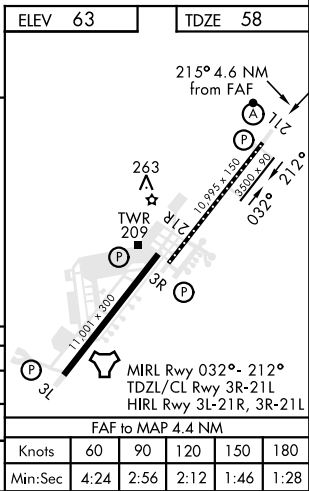

ILS or LOC RWY 21L

SW-2, 27 JAN 2022 to 24 FEB 2022

SW-2, 27 JAN 2022 to 24 FEB 2022