

WAAS CH 69499 W12A	APP CRS 123°	Rwy Idg TDZE 541 Apt Elev 618	9013
--	------------------------	---	-------------

RNAV (GPS) Y RWY 12L

ST LOUIS LAMBERT INTL (STL)


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase LPV all Cats visibility to 1½ SM, LNAV/VNAV Cat E visibility to 1¾ SM, and LNAV Cat E visibility to 1¾ SM. Simultaneous approach authorized with Rwy 11. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.

ALSIF-2

MISSED APPROACH: Climb to 3000 direct ODITY and on track 071° to TOY VORTAC and hold.

D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 120.05 284.6	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	CLNC DEL 119.5 363.1	CPDLC
--	---	--	---	--------------------------------	-------

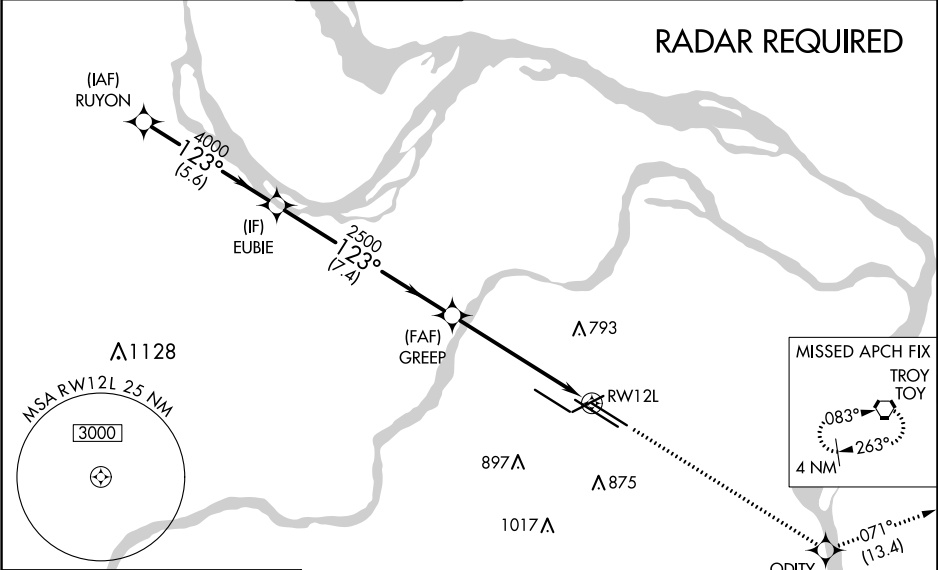

ELEV 618 TDZE 541

123° to RW12L

Rwy 6-24 7603 X 150
Rwy 11-29 9000 X 150
Rwy 12L-30R 9013 X 150
Rwy 12R-30L 11020 X 200

HIRL all Rwys
TDZ/CL Rwy 11, 12L, 12R, 29, and 30R

<p>RUYON</p> <p>EUBIE</p> <p>GREEP</p> <p>TOY</p> <p>3000</p> <p>ODITY</p> <p>tr 071°</p> <p>5000</p> <p>4000</p> <p>2500</p> <p>123°</p> <p>GP 3.00° TCH 54</p> <p>5.6 NM</p> <p>7.4 NM</p> <p>4.5 NM</p> <p>1.4 NM</p> <p>*1.4 NM to RW12L</p> <p>RW12L</p> <p>*LNAV only</p>					
CATEGORY	A	B	C	D	E
LPV DA	951/50 410 (400-1)				
LNAV/VNAV DA	1040/60 499 (500-1¼)				
LNAV MDA	1040/24 499 (500-½)	1040/40 499 (500-¾)		1040/50 499 (500-1)	1040/60 499 (500-1¼)