

RNP AR APCH. RF required.



▼

-13°C

For uncompensated Baro-VNAV systems,  
procedure NA below -14°C or above 54°C.

MISSED APPROACH: Climb to 4000 direct JAYYT and on track 149° to TPUCK and on track 107° to MONAT and hold. # Missed approach requires minimum climb of 217 feet per NM to 3200.

ATIS 132.375	ROANOKE APP CON 126.9 339.8	ROANOKE TOWER 118.3 257.8	GND CON 121.9 257.8	CLNC DEL 119.7
-----------------	--------------------------------	------------------------------	------------------------	-------------------

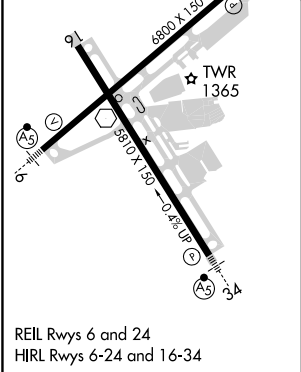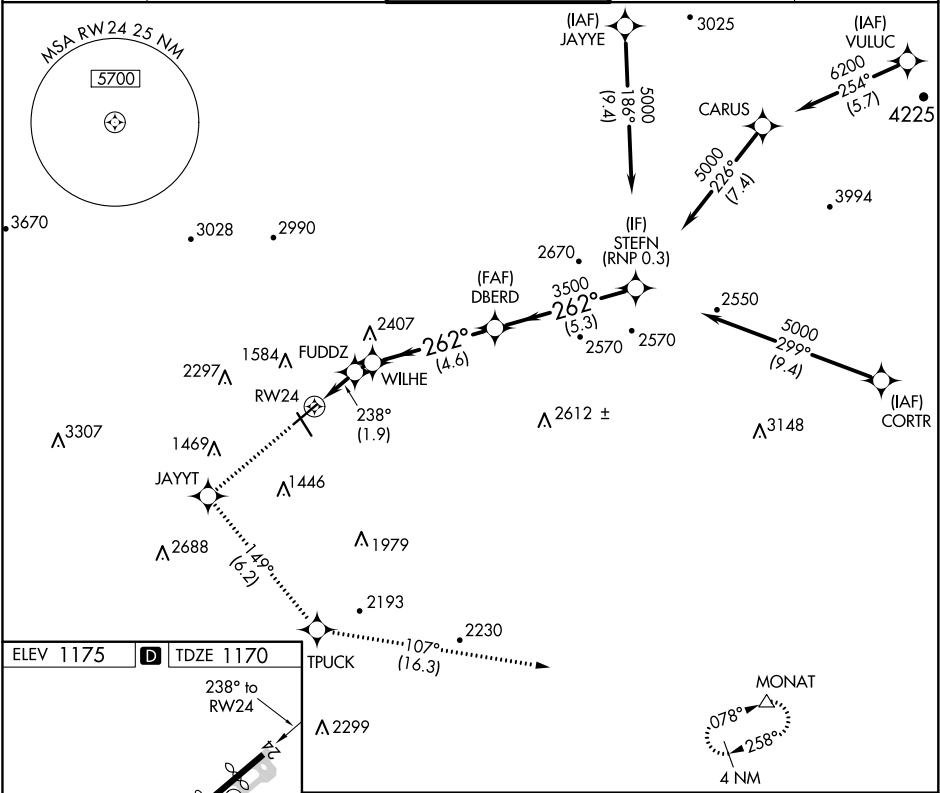

4000	JAYYT	TPUCK	MONAT	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 58).
↑	tr 149°	tr 107°	△	
	FUDDZ 1815	WILHE 2045	DBERD 3500	STEFN 5000
	238°	262°	267°	3500
	1.9 NM	0.7 NM	4.6 NM	5.3 NM
CATEGORY	A	B	C	D
# RNP 0.15 DA		1491-1	321 (400-1)	
RNP 0.30 DA		1579-1½	409 (500-1½)	
GP 3.00 TCH 55				