

LOC/DME	I-OJW	APP CRS	Rwy Idg	5700
108.3		183°	TDZE	55
Chan 20			Apt Elev	56

LDA/DME RWY 20R



JOHN WAYNE/ORANGE COUNTY (SNA)

When local altimeter not received, use Fullerton altimeter setting and increase all MDA 40 feet and increase S-20R Cats C/D visibility to RVR 5000 and Circling Cat C visibility ¼ mile. Helicopter visibility reduction below RVR 4000 NA.

MALSRL

MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 direct SLI VORTAC and hold.

D-ATIS	SOCAL APP CON	JOHN WAYNE TOWER ★	GND CON	CNLC DEL	CPDLC	UNICOM
126.0	121.3 263.1	126.8 (CTAF) 343.625	(EAST) 120.8 (WEST) 132.25	118.0		122.95

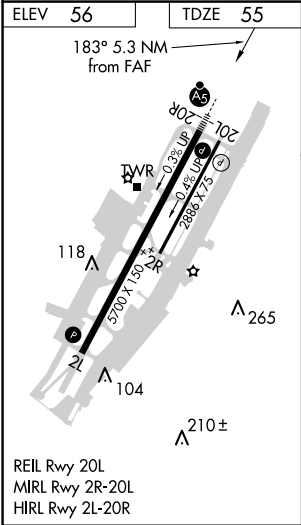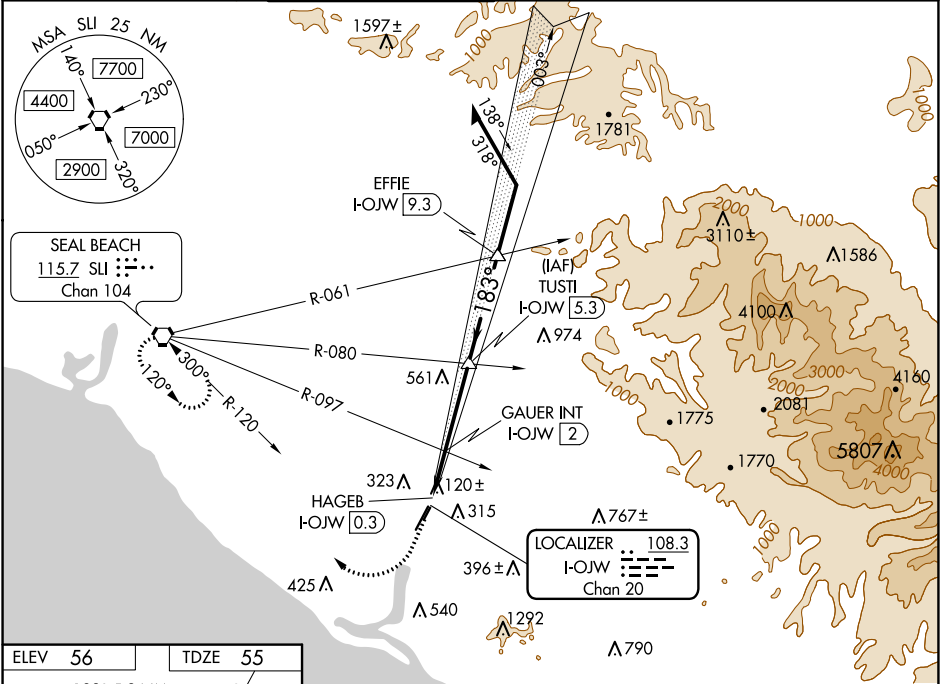

1000	3000	SLI	TUSTI I-OJW 5.3	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 68). Remain within 10 NM
			GAUER INT I-OJW 2	003°
			HAGEB I-OJW 0.3	183°
			3.50° TCH 63	2800
			880	1900
			0.4	1.7 NM
			3.2 NM	4 NM
CATEGORY	A	B	C	D
S-20R	400/40 345 (400-¾)			
CIRCLING	640-1	584 (600-1)	840-2¼ 784 (800-2¼)	1160-3 1104 (1200-3)

SW-3, 27 JAN 2022 to 24 FEB 2022

SW-3, 27 JAN 2022 to 24 FEB 2022