

RNP APCH.

▼

▲

88-13°C

Circling NA northwest of Rwy 6-24. For inop ALS, increase LNAV** Cat A and B visibility to 1 SM, LNAV Cat A visibility to 1 SM, and LNAV Cat C and D visibility to 2 1/2 SM.


MALSR

▲5

▲5

MISSED APPROACH: Climbing right turn to 4000 direct DEWET and hold.
** Missed approach requires minimum climb of 276 feet per NM to 2700.

ATIS	ROANOKE APP CON	ROANOKE TOWER	GND CON	CLNC DEL
132.375	126.9 339.8	118.3 257.8	121.9 257.8	119.7

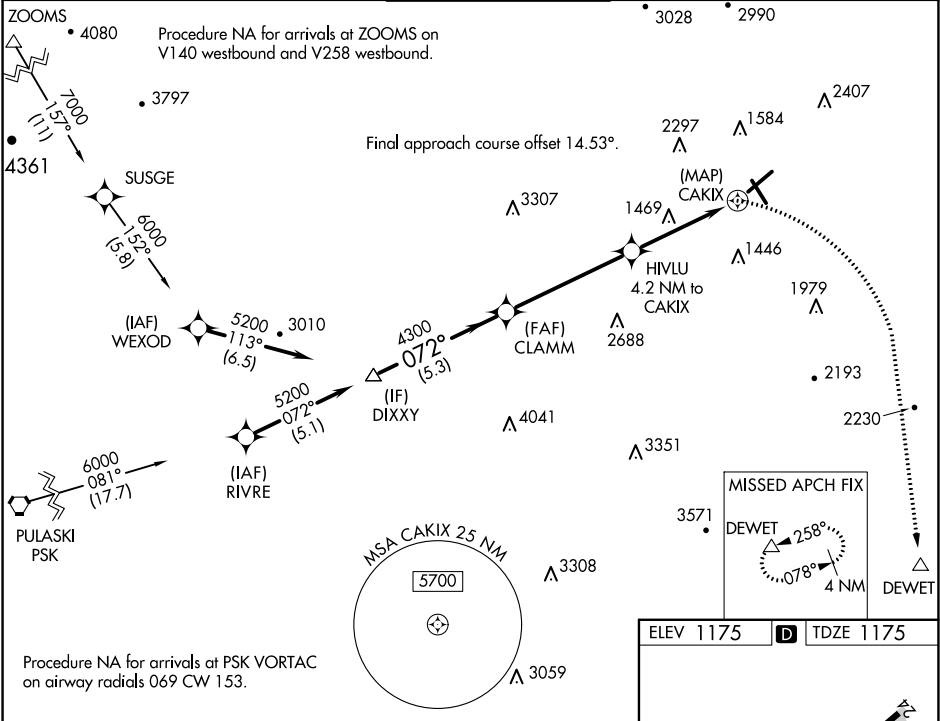

CATEGORY	A	B	C	D
LNAV MDA**	1720-3/4	545 (600-3/4)	1720-1/8	545 (600-1/8)
LNAV MDA	1980-3/4	805 (900-3/4)	1980-1/8	805 (900-1/8)
CIRCLING	1980-1 805 (900-1)	1980-1 1/4 805 (900-1 1/4)	2420-3 1245 (1300-3)	2820-3 1645 (1700-3)

REIL Rwy 6 and 24
HIRL Rwy 6-24 and 16-34