RNAV (RNP) Z RWY 19L
HARRY REID INTL (LAS)

APP CRS	Rwy ldg	8808
194°	TDZE	2112
	Apt Elev	2181

RNP AR APCH. RF required.

For uncompensated Baro-VNAV systems, procedure NA below 0°C or above 54°C. Missed approach requires RNP less than 1.0.

MISSED APPROACH: Climb to 7000 on the RNAV missed approach route to MATLR and hold, continue climb-in-hold to 7000.
*Missed approach requires minimum climb of 225 feet per NM to 5000.

D-ATIS	LAS VEGAS APP CON	LAS VEGAS TOWER	GND CON	CLNC DEL	CPDLC
132.4	125.025 379.15 (West) 125.6 282.2 (East)	118.75 257.8 (Rwy 1L/19R, 1R/19L) 119.9 257.8 (Rwy 8L/26R, 8R/26L)	121.1 270.8 E of 1R/19L 121.9 254.3 W of 1R/19L	118.0	

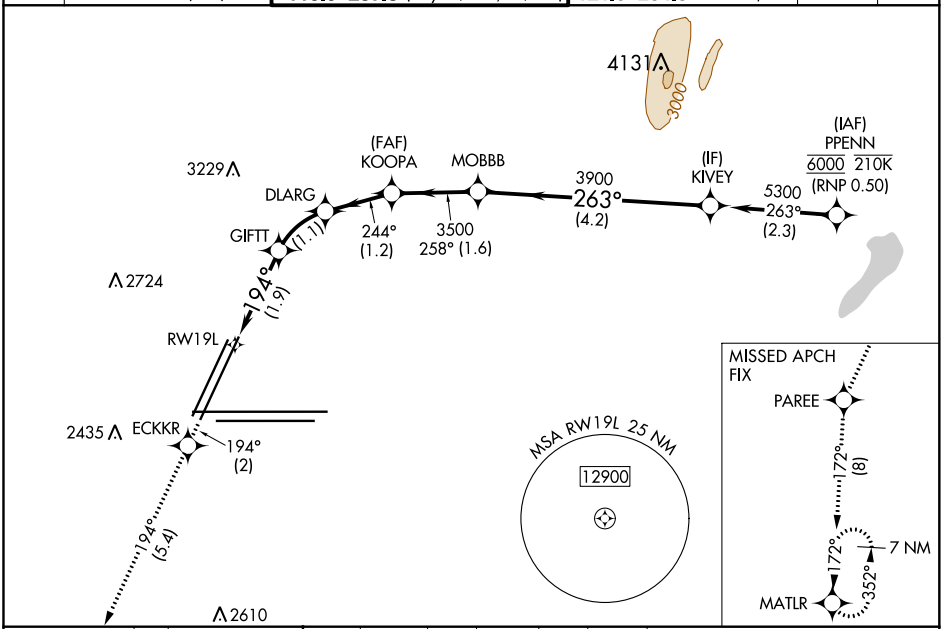

ELEV 2181	D	TDZE 2112

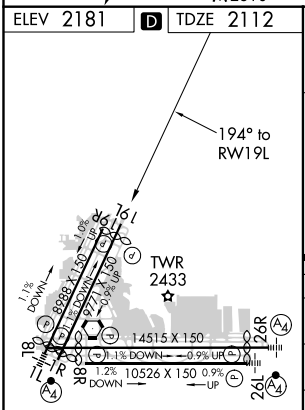

MIRL Rwy 1R-19L
REIL Rwys 1R, 8R, 19L and 19R
HIRL Rwys 1L-19R, 8L-26R and 8R-26L

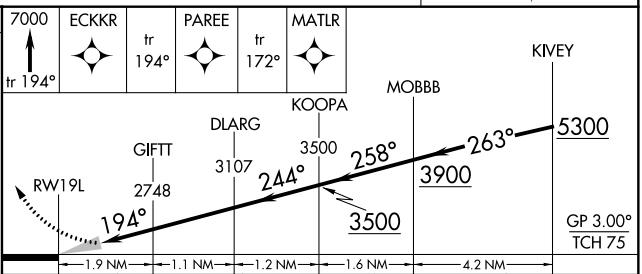

CATEGORY	A	B	C	D
RNP 0.10 DA*	2470-1 358 (300-1)			
RNP 0.20 DA*	2488-1 376 (400-1)			
RNP 0.30 DA*	2512-1⅛ 400 (400-1⅛)			
RNP 0.30 DA	2582-1⅜ 470 (500-1⅜)			

AUTHORIZATION REQUIRED

SW-4, 27 JAN 2022 to 24 FEB 2022

SW-4, 27 JAN 2022 to 24 FEB 2022