



RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. When control tower closed, LPV and LNAV/VNAV NA; increase LNAV all Cats visibility to 1 mile. When control tower closed, inop table does not apply to LNAV Cats A and B. When control tower closed, for inop MALSR, increase LNAV Cat C and D visibility to 1½ mile.

MALSR

MISSED APPROACH: Climb to 3000 direct ACIPU and on track 047° to PAIRS and hold, continue climb-in-hold to 3000.

ATIS 124.375	TAMPA APP CON 119.65 353.575	SARASOTA TOWER ★ 120.1 (CTAF) 256.8	GND CON 121.9 273.6	CLNC DEL 118.25	UNICOM 122.95
-----------------	---------------------------------	--	------------------------	--------------------	------------------

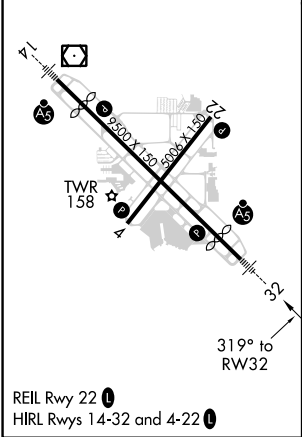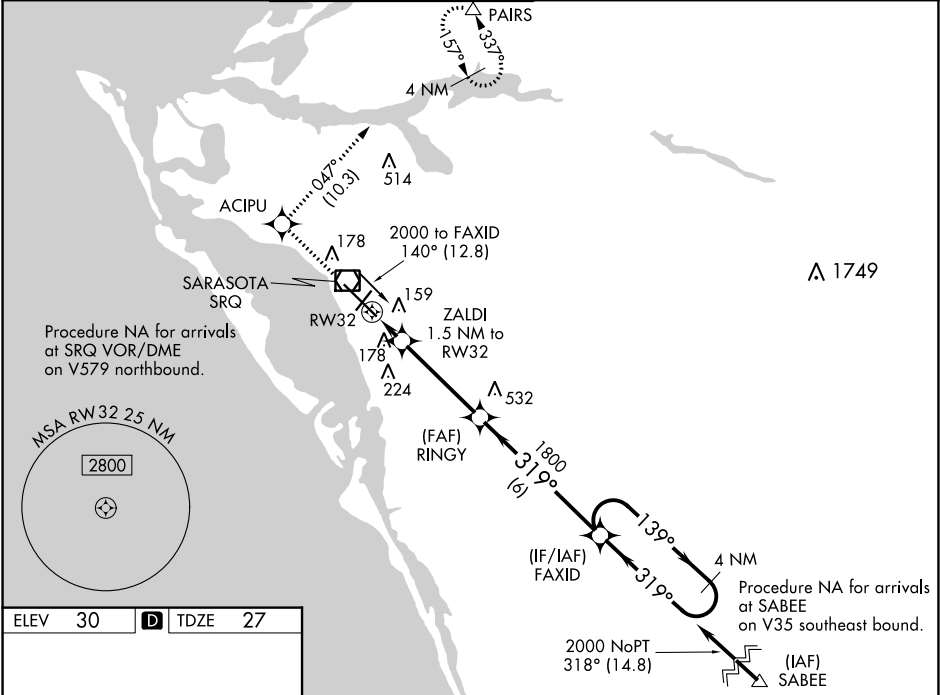

3000	ACIPU	tr 047°	PAIRS	FAXID	4 NM Holding Pattern
*LNAV only.	ZALDI 1.5 NM to RW32	RINGY 1800	139°	2000	GP 3.00° TCH 53
RW32	540*	1800	319°		
1.5 NM	3.9 NM	6 NM			
CATEGORY	A	B	C	D	
LPV DA		227-½	200 (200-½)		
LNAV/ VNAV DA		463-1	436 (500-1)		
LNAV MDA	440-½	413 (500-½)	440-¾	413 (500-¾)	
CIRCLING	500-1	470 (500-1)	600-1½ 570 (600-1½)	600-2 570 (600-2)	