
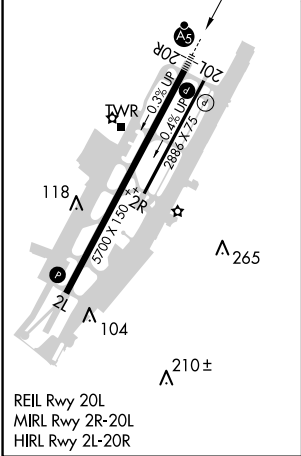


WAAS CH 99502 W20A	APP CRS 196°	Rwy Idg TDZE 55 Apt Elev 56	5700
--	------------------------	---	-------------

RNAV (GPS) Y RWY 20R
JOHN WAYNE/ORANGE COUNTY (SNA)

<p>V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C (41°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. # RVR 1800 authorized with use of FD or AP or HUD to DA.</p>			MALSR 	MISSED APPROACH: Climb to 3000 direct MINOE.		
D-ATIS 126.0	SOCAL APP CON 121.3 263.1	JOHN WAYNE TOWER ★ 126.8 (CTAF) 0 343.625		GND CON (EAST) 120.8 (WEST) 132.25	CLNC DEL 118.0	CPDLC UNICOM 122.95

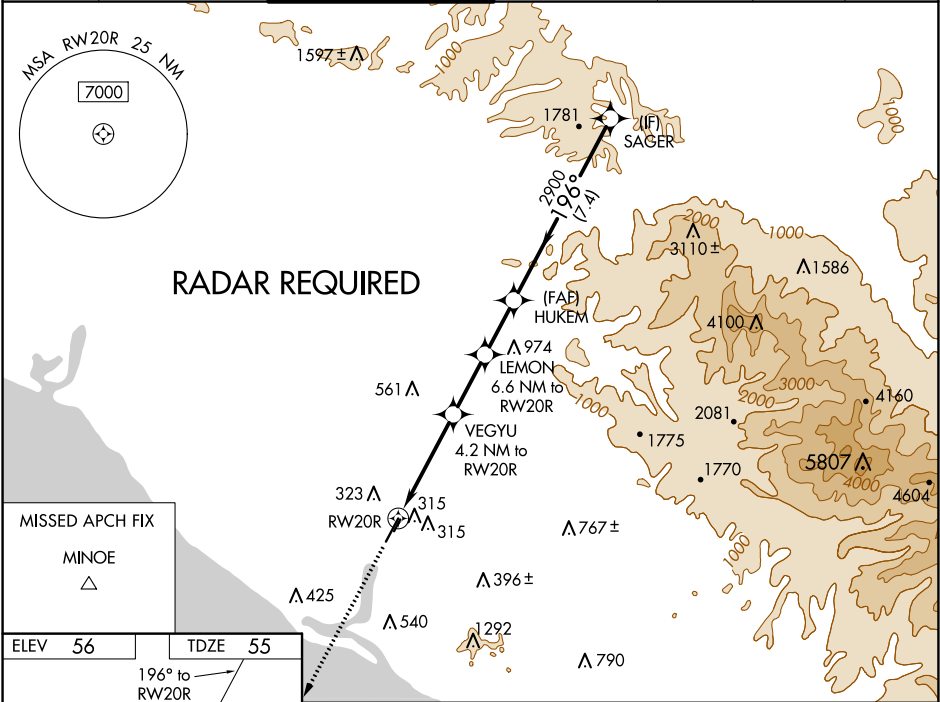

3000 ↑	MINOE △	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 68).				HUKEM	SAGER
*LNAV only.		VEGYU 4.2 NM to RW20R		LEMON 6.6 NM to RW20R	2900	3500	
RW20R		1420*		2200*		196°	2900
1.5 NM		2.7 NM		2.4 NM		2.2 NM	
						7.4 NM	
CATEGORY		A		B		C	D
LPV DA#		255/24		200 (200-½)			
LNAV/VNAV DA		516/60		461 (500-1¼)			
LNAV MDA		580/24	525 (600-½)	580/55		525 (600-1)	
CIRCLING		640-1	584 (600-1)	840-2¼ 784 (800-2¼)		1160-3 1104 (1200-3)	