

HI-ILS or LOC/DME Z RWY 23L

LOC I-EDW 110.1	APCH CRS 226°	Rwy Idg TDZE Arpt Elev 15,024 2286 2311
---------------------------	-------------------------	---


JAL-500 (USAF)

EDWARDS AFB (KEDW)

⚠ * Circling not authorized NW of Rwy 5L-23R. Circling not authorized at night to Rwy 5L-23R.

MISSED APPROACH: Climb to 11,000. Track EDW VORTAC R-226 outbound to GRIES, then turn left direct COOLS and hold. Missed Approach requires use of RNAV or ATC RADAR monitoring.

ATIS* 127.425 269.9	SPORT APP CON/DEP CON 132.75 343.7	TOWER* 120.7 (CTAF) 318.1 (CTAF)	GND CON 121.8 225.4
-------------------------------	--	--	-------------------------------

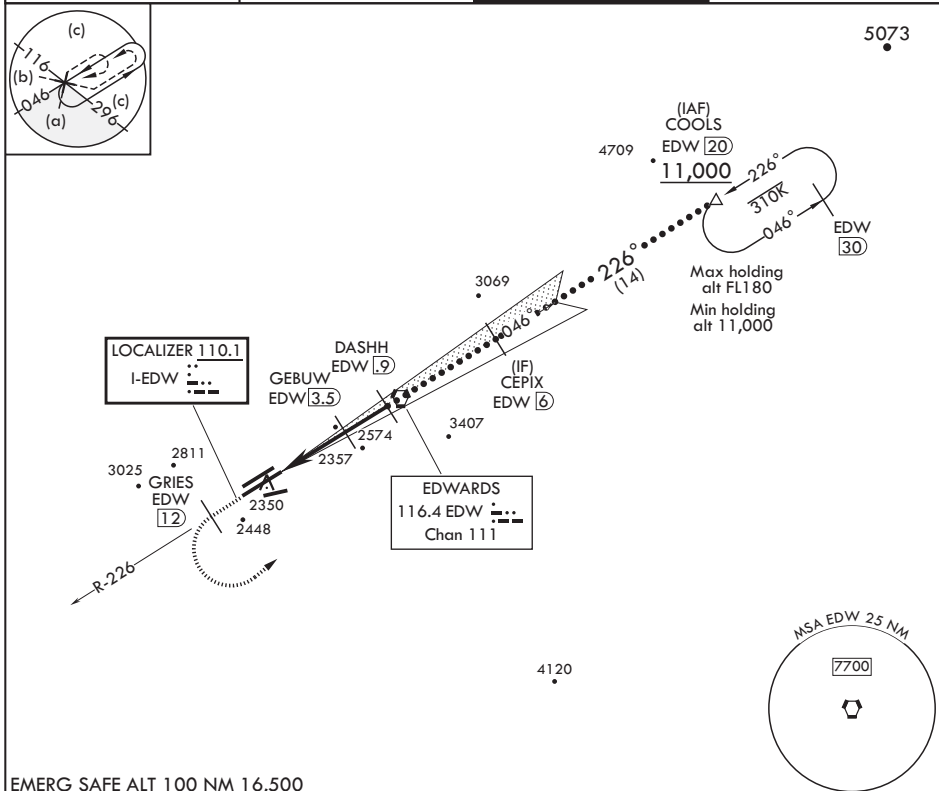

EMERG SAFE ALT 100 NM 16,500

11,000 EDW R-226	GRIES EDW 12	COOLS EDW 20	LOC only	COOLS 20	ELEV 2311	TDZE 2286
CURBO 7.5	GEBUW 3.5	VORTAC DASHH 9	CEPIX 6	5900	GS 2.50° TCH 50	226° 6.6 NM from FAF
3300†	4100	11,000				
4 NM	2.6 NM					
CATEGORY	C	D	E			
S-ILS 23L	2486-¾	200	(200-¾)			
S-LOC 23L	2540-¾	254	(300-¾)			
CIRCLING*	2880-1½ 569 (600-1½)	2880-2	569 (600-2)			

HI-ILS or LOC/DME Z RWY 23L