


⚠

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (117°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Frankfort altimeter setting: increase LPV DA to 1329 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1434 feet and all visibilities ¼ SM; increase all MDAs 80 feet and visibility Cts C and D ¼ SM. Baro-VNAV and VDP NA when using Frankfort altimeter setting. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 3200 direct SAAPP and hold.

ATIS 126.3	LEXINGTON APP CON 120.15 259.3	LEXINGTON TOWER 119.1 257.8	GND CON 121.9	CLNC DEL 132.35
---------------	-----------------------------------	--------------------------------	------------------	--------------------

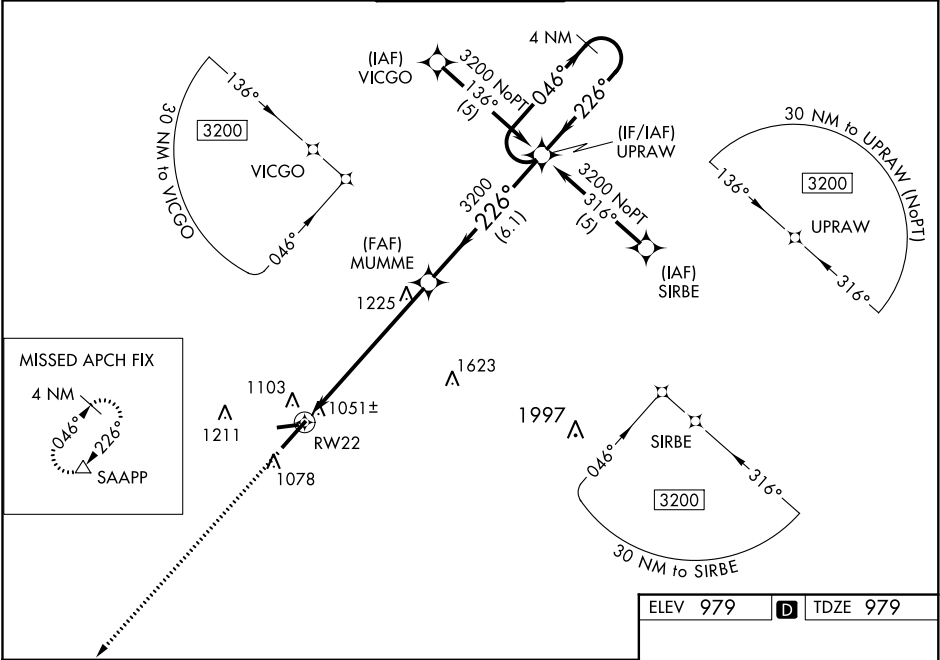

3200	SAAPP	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 60).			
↑	△	4 NM Holding Pattern			
*LNAV only.					

