
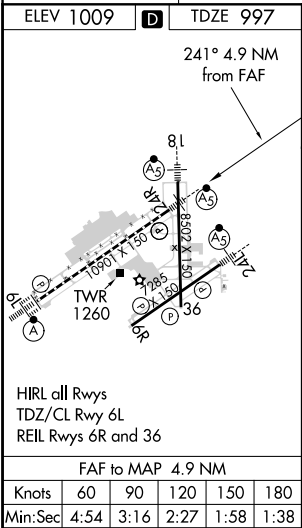


LOC/DME I-VUQ 111.9 Chan 56	APP CRS 241°	Rwy Idg 10900 TDZE 997 Apt Elev 1009
---	------------------------	---

ILS or LOC RWY 24R
JAMES M COX DAYTON INTL (DAY)

Simultaneous approach authorized. For inop ALS, increase S-LOC 24R Cat C/D visibility to RVR 6000.		MALSR 	MISSED APPROACH: Climb to 3000 then right turn direct DQN VOR/DME and hold.	
ATIS 125.8	COLUMBUS APP CON 118.425 323.15	DAYTON TOWER 119.9 257.7	GND CON 121.9	CLNC DEL 121.75

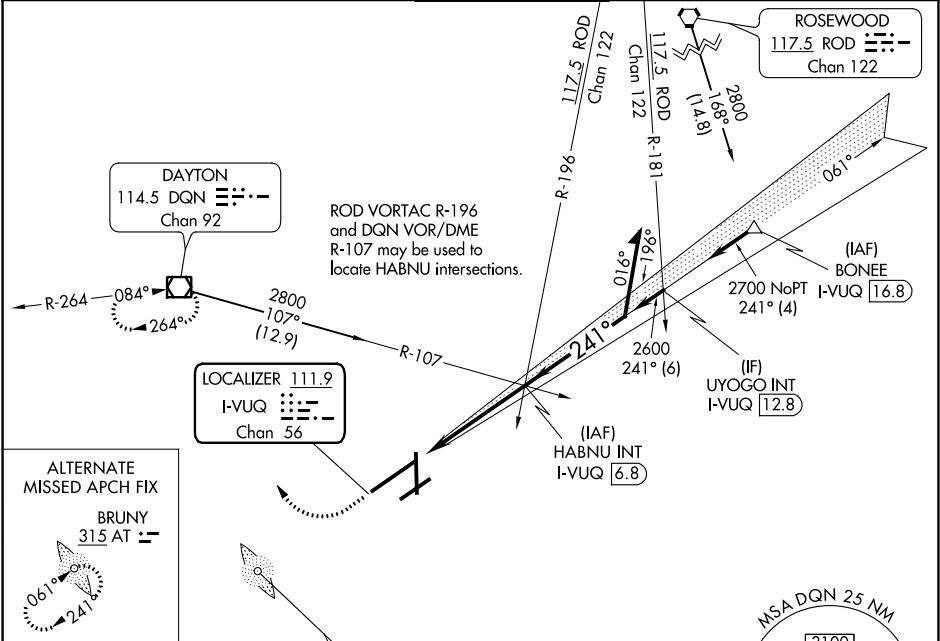

ELEV 1009	TDZE 997	241° 4.9 NM from FAF			
LOM BRUNY 315 AT		MSA DQN 25 NM			
2049		HABNU INT I-VUQ 6.8			
3000		DQN			
I-VUQ 2		I-VUQ 3			
1.1 NM		3.8 NM			
CATEGORY		A B C D			
S-ILS 24R		1203/24 206 (200-½)			
S-LOC 24R		1400/24 403 (400-½) 1400/40 403 (400-¾)			
CIRCLING		1580-1 571 (600-1) 1580-1½ 571 (600-1½) 1640-2 631 (700-2)			