RNP APCH. V

Δ

ASR

SC-2,

27 JAN 2022

ਰ

24 FEB

**ELEV** 

3607

Δ

**RW13** 

3980-11/4

377 (400-11/4)

4280-21/4

673 (700-21/4)

WAAS 7901 APP CRS Rwy Idg CH 57919 TDŹE 3603 129° 3607 Apt Elev W13A


## RNAV (GPS) Y RWY 13

RICK HUSBAND AMARILLO INTL (AMA)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C.

MISSED APPROACH: Climb to 5400 direct PAMPE and on track 105° to CAUDE and hold.

AMARILLO APP CON★ AMARILLO TOWER★ GND CON CLNC DEL **ATIS UNICOM** 118.85 350.3 119.5 307.0 118.3(CTAF) 257.9 121.9 348.6 121.65 239.275 122.95

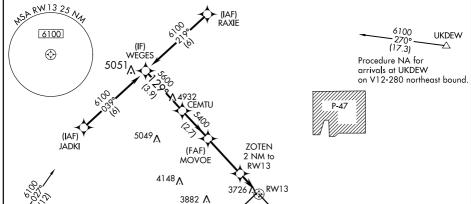

**1**3754

SIDER Procedure NA for arrivals at SIDER on V402 southwest bound.

> D **TDZE**

129° to

**RW13** 

3603

CAUDE 2 5400 PAMPE CAUDE WEGES 105° CEMTU \* LNAV only.

**PAMPE** 

1...1059....

4 <sup>3745</sup>·1<sub>77</sub>, ∧ 3745·1<sub>77</sub>, ∧

6100 1290 MOVOE **ZOTEN** 5400 2 NM to \*1 NM to Procedure 5600 RW13 **RW13** Turn NA 4280 5400 GP 3.00° TCH 52 3.9 NM -- 2.7 NM 3.4 NM --— 1 NM CATEGORY LPV 3803-3/4 DA 200 (200-3/4) LNAV/ DA 3976-11/4 373 (400-11/4) VNAV LNAV MDA 3980-1 377 (400-1)

C CIRCLING

REIL Rwy 13 and 31 HIRL Rwys 4-22 and 13-31 AMARILLO, TEXAS Amdt 1A 10SEP20

RICK HUSBAND AMARILLO INTL (AMA)RNAV (GPS) Y RWY 13

4240-13/4

633 (700-13/4)

4080-1 473 (500-1)