

▼

▲


ASR

EYECE FIX MINIMUMS: For inop ALS, increase S-8 Cat C/D/E visibility to RVR 5500.
For inop ALS, increase S-8 Cat E visibility to 3 SM.
Circling Cat E NA southeast of Rwy 3-21 and northeast of Rwy 12-30.

MALSR

MISSED APPROACH: Climb to 5800 then climbing right turn to 8000 direct ABQ VORTAC and hold.

D-ATIS	ALBUQUERQUE APP CON	ALBUQUERQUE TOWER	GND CON	CLNC DEL	CPDLC
118.0 257.7	123.9 354.1	120.3 351.9	121.9 348.6	119.2 259.3	

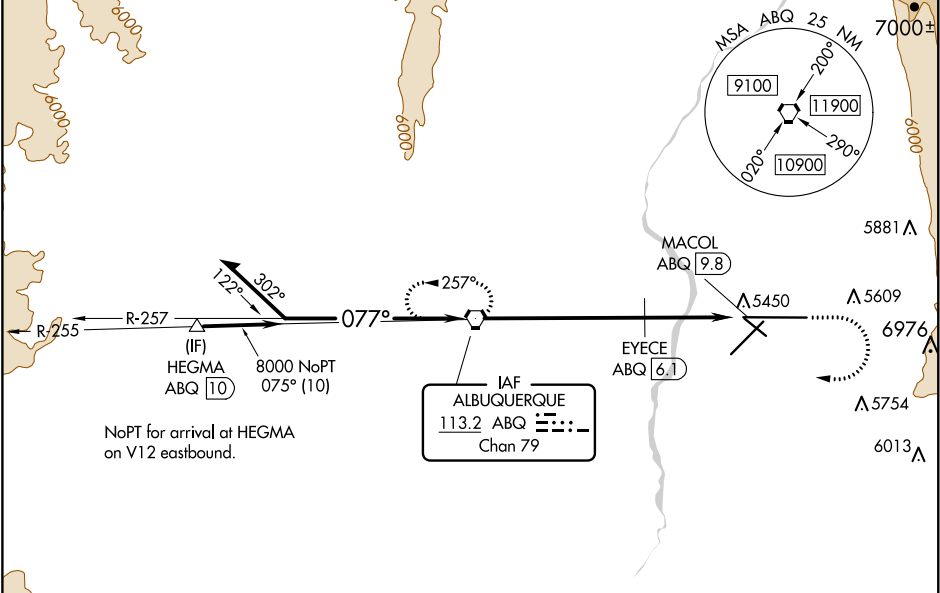

ELEV 5355

TDZE 5320

Remain within 15 NM

ABQ VORTAC

8200

257°

077°

8000

6380

6.1 NM

2.6 NM

1.1 NM

5800

8000

ABQ

EYECE ABQ 6.1

ABQ 8.7

MACOL ABQ 9.8

077° 9.8 NM from FAF

TWR

5533

13793 X 150

0.5% DOWN

26

6000

1000

500

250

150

100

50

25

10

5

2

1

0

MIRL Rwy 12-30
TDZ/CL Rwy 3 and 8
HIRL Rwy 3-21 and 8-26
REIL Rwy 21, 26, and 30

CATEGORY	A	B	C	D	E
S-8	6380/40 1060 (1100-¾)	6380/55 1060 (1100-1)	6380-2½	1060 (1100-2½)	
CIRCLING	6380-1¼ 1025 (1100-¾)	6380-1½ 1025 (1100-½)	6380-3 1025 (1100-3)	6460-3 1105 (1200-3)	7460-3 2105 (2200-3)
EYECE FIX MINIMUMS					
S-8	5700/24	380 (400-½)	5700/40	380 (400-¾)	
CIRCLING	5840-1 485 (500-1)	5920-1 565 (600-1)	5940-1½ 585 (600-1½)	6460-3 1105 (1200-3)	7460-3 2105 (2200-3)

FAF to MAP 9.8 NM

Knots	60	90	120	150	180
Min:Sec	9:48	6:32	4:54	3:55	3:16