12,001 Rwy Idg TDZE APCH CRS 275 294 326° Arpt Elev

AL-442 (USAF)

ROBINS AFB (KWRB)


* When ALS inop increase CAT ABCDE vis to 1 7/8 miles. ** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE vis to 1 3/8.

*** Circling NA SW of RWY 33-15.

 (A_1)

MISSED APPROACH: Climb to 2600 direct CAMGI and hold.

ATLANTA APP CON/DEP CON TOWER GND CON ATIS 119.475 273.475 124.2 279.6 133.225 257.975 121.85 275.8 676 4 NM DME/DME RNP-0.3 NA For uncompensated Baro-VNAV systems, Procedure NA below -15°C (5°F) or above 54°C (130°F). CAUTION: When Rwy 15 VGSI inop, circling to Rwy 15 NA at night. Circling visibility reduction by helicopters NA. 566 MIDDLE GEORGIA RGNL RW33 477 (FAF) JÀLGÁ (IAF) ZAPID 2600 SP RW33 25 Nu 2700 **(** 4 NM (IAF) (IAF/IF) NEXIE 2600 EMERG SAFE ALT 100 NM 3700 2600 294 **TDZE 275** VGSI and descent ELEV CAMGI

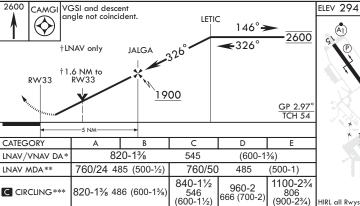

BCN 457

WARNER ROBINS, GEORGIA

32°38'N - 83°36'W

 326° to RW33 ROBINS AFB (KWRB)

27 JAN 2022

ಠ **24 FEB**